
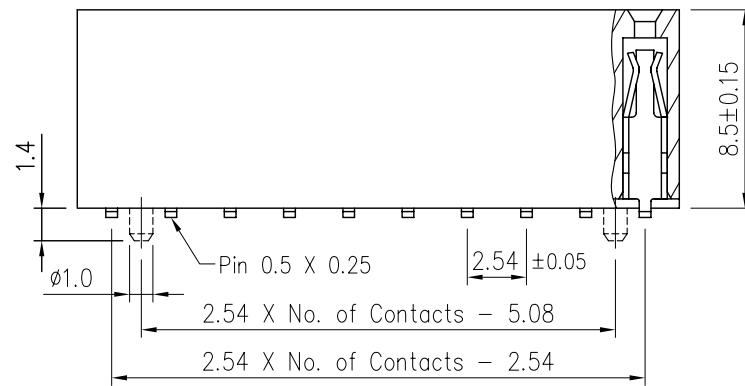
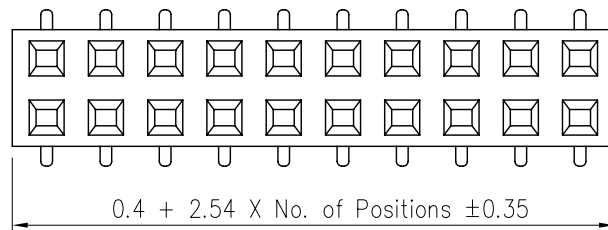


Recommended
P.C.Board Layout

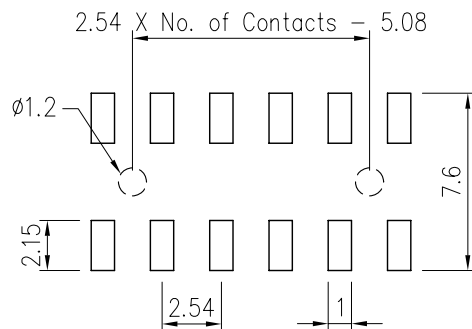

Specifications

Current Rating : 3 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 600V

Operating Temperature : -40°C ~ +105°C

Max Processing Temp : 230°C For 30~60 Seconds
(260° For 10 Seconds)

Contact Materil : Phosphor Bronze

Insulator Material : Poltester, UL 94V-0

Standard : Nylon-6T

Contact Plated : Full Gold, Full Tin, Selective Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-V89P-2Xxx-LF
SERIES 180°SMT POST HIGH 8.9mm
LEADFREE
2X02:04WAY
2X40:80WAY

DESCRIPTION: Female Header P2.54mm Profile : 8.5mm,Dual Rows, SMT Type