
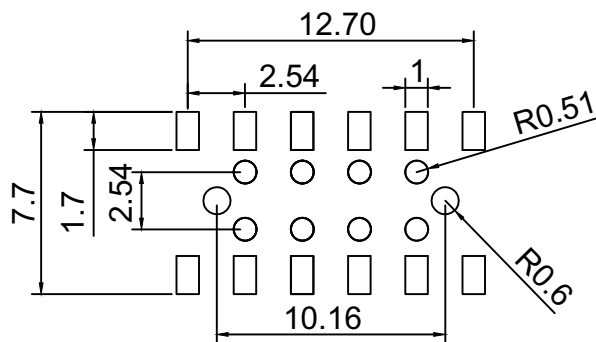

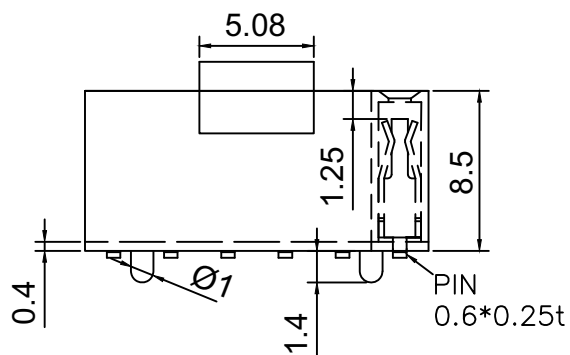


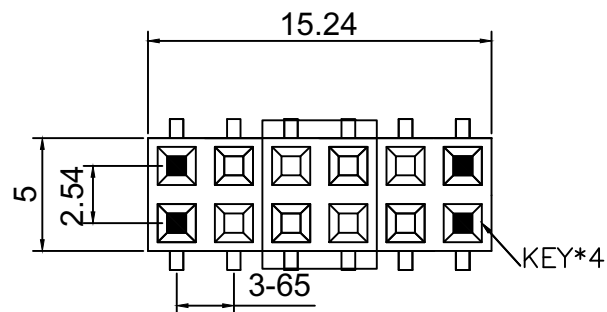

RECOMMENDED P.C.B. LAYOUT

specifications

current rating:3amp
voltage rating:250V ac max
insulator resistance:5000 M ohms min.
contact resistance:20 m ohms max.
dielectric withstanding:500v ac for one minute
operating temperature:-40°C--+105°C(ny9t)
max.processing temp:245±5°C for 3-5seconds(ny9t)

contact material:phosphor bronze
insulator material:ny9t
color:black
finish:gold flash
packing:bag/tray

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.35

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

F-V89PC-2X06K4C-LF

SERIES 180°SMT HIGH 8.95mm
CAP POST
LEADFREE
KEY #4 PIN
12 WAY

DESCRIPTION: 2.54mm Female Header, dual rows, SMT Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com