

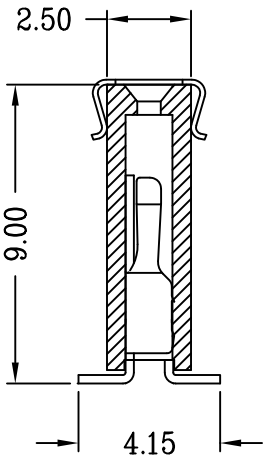


SPECIFICATIONS
CURRENT RATING: 3 AMP
INSULATION RESISTANCE: 1000M OHMS MIN.
DIELECTRIC WITHSTANDING: 600V AC/DC
CONTACT RESISTANCE: 20m OHMS MAX.
OPERATING TEMPERATURE: -40℃ ~ +105℃

MATERIALS
CONTACT MATERIAL: PHOSPHOR BRONZE
INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

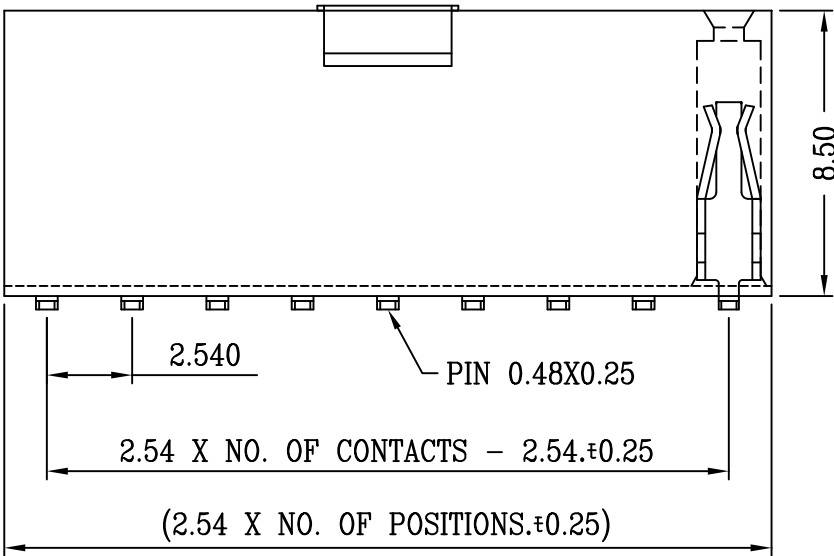

F-V90XC-1XxxR-LF
LEADFREE
RoHS Compliant

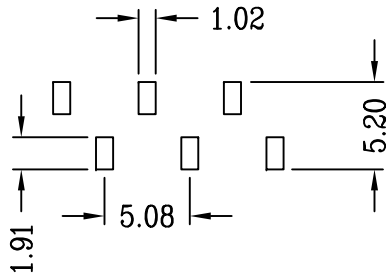

RECOMMENDED P.C.B LAYOUT

MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. F-V90XC-1XxxR		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 2.54mm Female Socket Single SMD type (H=9.0)				
	DWG NO. F-V90XC-1XxxR									
	FILE NO.		DRAWING BY							
	UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE		

煜倫股份有限公司