
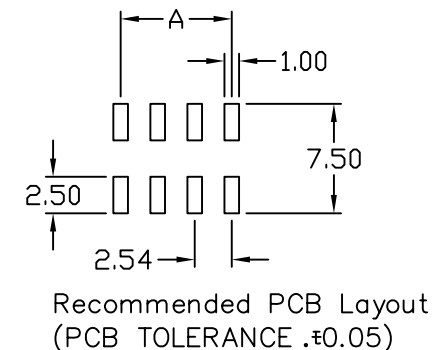
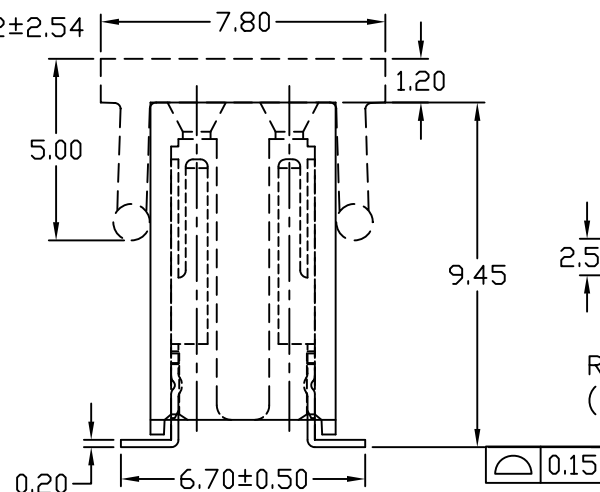
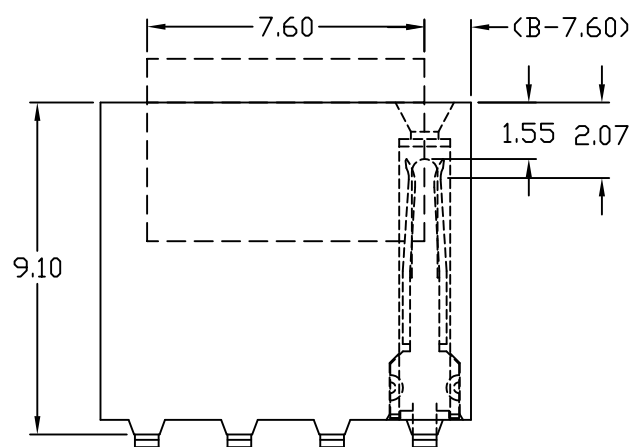


No. of Contacts	DIMENSIONS		REMARK
	A	B	(ウニオ?)
6	5.08	7.62	◎
8	7.62	10.16	◎
10	10.16	12.70	◎
12	12.70	15.24	◎
14	15.24	17.78	◎
16	17.78	20.32	◎
18	20.32	22.86	◎
20	22.86	25.40	◎
22	25.40	27.94	◎
24	27.94	30.48	◎
26	30.48	33.02	◎
28	33.02	35.56	◎
30	35.56	38.10	◎
32	38.10	40.64	◎
34	40.64	43.18	◎
36	43.18	45.72	◎
38	45.72	48.26	◎
40	48.26	50.80	◎
42	50.80	53.34	◎
44	53.34	55.88	◎
46	55.88	58.42	◎
48	58.42	60.96	◎
50	60.96	63.50	◎
52	63.50	66.04	◎
54	66.04	68.58	◎
56	68.58	71.12	◎
58	71.12	73.66	◎
60	73.66	76.20	◎
62	76.20	78.74	
64	78.74	81.28	
66	81.28	83.82	
68	83.82	86.36	
70	86.36	88.90	
72	88.90	91.44	
74	91.44	93.98	
76	93.98	96.52	
78	96.52	99.06	
80	99.06	101.60	

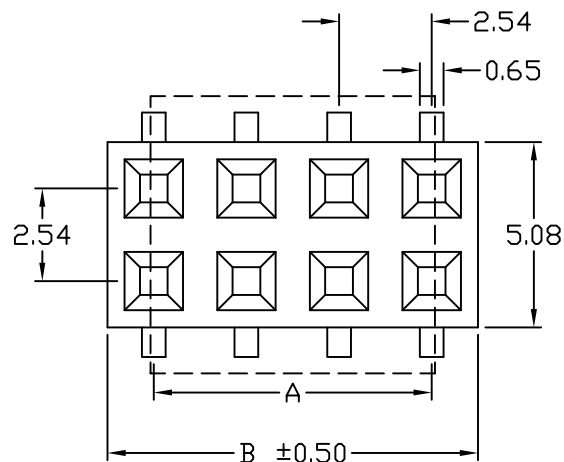

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms Min.
 Contact resistance: 20 m ohm Max.
 Dielectric withstanding: AC 500 V
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Phosphor bronze
 Insulator Material: High Temperature
 Thermoplastic, UL 94V-0
 Color : Black

Finish: Tin, Gold or Duplex plated

◎ Note:

Duplex plating: gold plated on contact area,
 Tin on solder area

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

F-V94XC-2Xxx-LF
 SERIES 180°SMT CAP NON POST HIGH 9.4mm
 LEADFREE 2X03:06 WAY 2X40:80 WAY

DESCRIPTION: 2.54X2.54mm SMD SOCKET

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±