
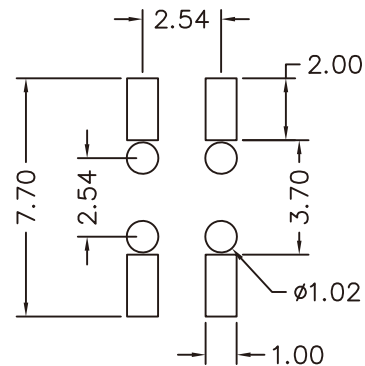



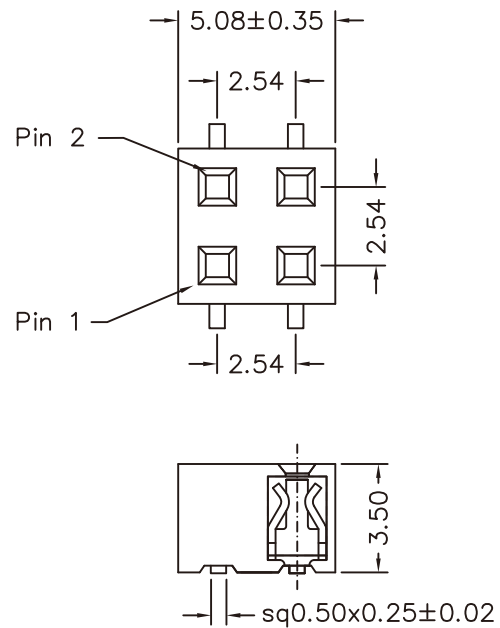

Bottom Entry
Recommended P.C.B Layout

MATERIAL

Insulator: NY6T

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

F-Z36X-2X02-LF
SERIES 04 WAY LEADFREE
NON POST
HIGH 3.55mm
BOTTOM ENTRY SMT

DESCRIPTION: FEMALE HEADER 2.54*2.54mm SMT TYPE, DUAL ROWS, HEIGHT 3.5mm