

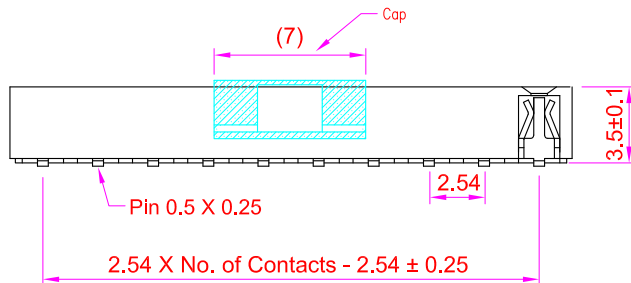
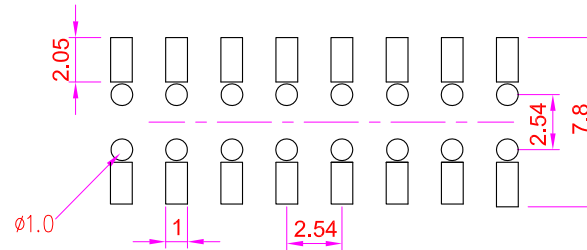


Recommended P.C. Board SMD Layout

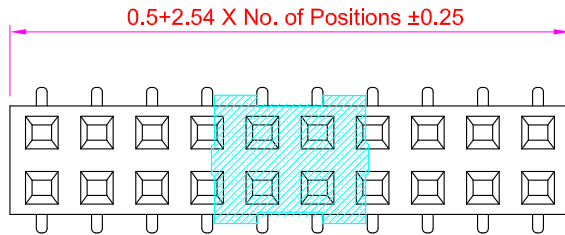

Specifications

Current Rating : 3 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 600V

Operating Temperature : -40°C ~ +105°C

Contact Material : Phosphor Bronze

Insulator Material : Polyester, UL 94V-0 Nylon-9T

Contact Plated : See Option

Standard: Full Gold Flash

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-Z36XC-2Xxx-LF
SERIES
LEADFREE
2X02:04WAY
2X40:80WAY
CAP
NON POST
HIGH 3.65mm
BOTTOM ENTRY SMT

DESCRIPTION: Female Header P:2.54 X 2.54mm Profile : 3.5mm, Dual Row, 3 Contacts SMD Type