
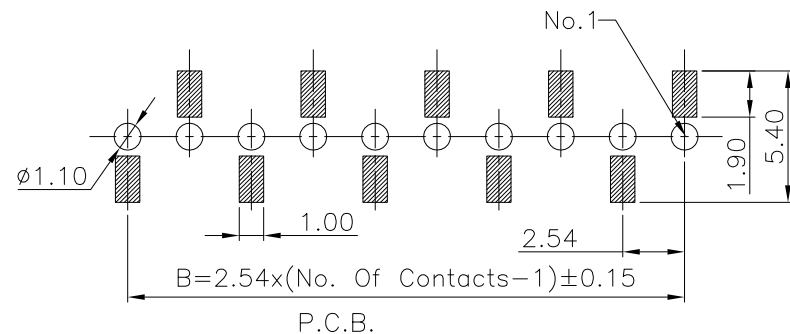
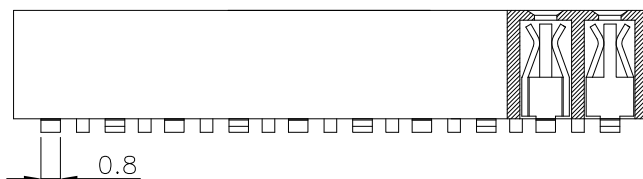


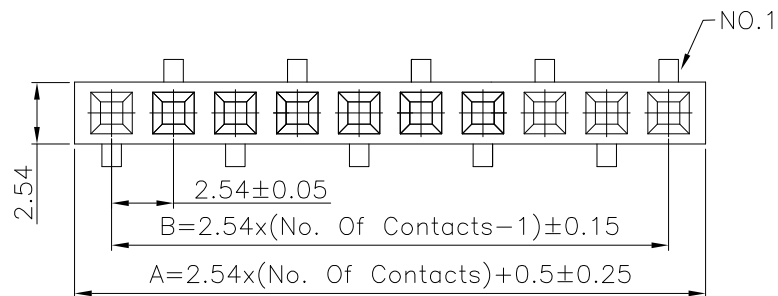

### Specifications:

Current Rating: 3.0A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 20m ohm. max.

Insulation Resistance: 1000M ohm. min.

Withstanding Voltage: 600V AC For One Minute

Operating Temperature Range: -40°C to +105°C

### Material and Finish

Insulator: High Temp Plastic (Nylon 9T UL94V-0)

Insulator Color: Black

Terminal: Phosphor Bronze

Finish: Gold/Tin/Selective Gold Plated

### Dimension:

| Poles | DIM:(mm) |       | Poles | DIM:(mm) |       | Poles | DIM:(mm) |       |
|-------|----------|-------|-------|----------|-------|-------|----------|-------|
|       | A        | B     |       | A        | B     |       | A        | B     |
| 2     | 5.58     | 2.54  | 9     | 23.36    | 20.32 | 16    | 41.14    | 38.10 |
| 3     | 8.12     | 5.08  | 10    | 25.90    | 22.86 | 17    | 43.68    | 40.64 |
| 4     | 10.66    | 7.62  | 11    | 28.44    | 25.40 | 18    | 46.22    | 43.18 |
| 5     | 13.20    | 10.16 | 12    | 30.98    | 27.94 | 19    | 48.76    | 45.72 |
| 6     | 15.74    | 12.70 | 13    | 33.52    | 30.48 | 20    | 51.30    | 48.26 |
| 7     | 18.28    | 15.24 | 14    | 36.06    | 33.02 |       |          |       |
| 8     | 20.82    | 17.78 | 15    | 38.60    | 35.56 |       |          |       |

### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ± 0.20  
.XX ± 0.15  
.XXX ±  
ANG ±

照片框

### ORDER INFORMATION

F-Z50X-1XxxL-LF  
SERIES  
BOTTOM ENTRY SMT  
LEADFREE  
L TYPE FOOT  
1X02:02WAY  
1X20:20WAY  
NON POST  
HIGH 5.0mm

DESCRIPTION: 2.54mm PCB Socket 5.0mm Height SMD Type