
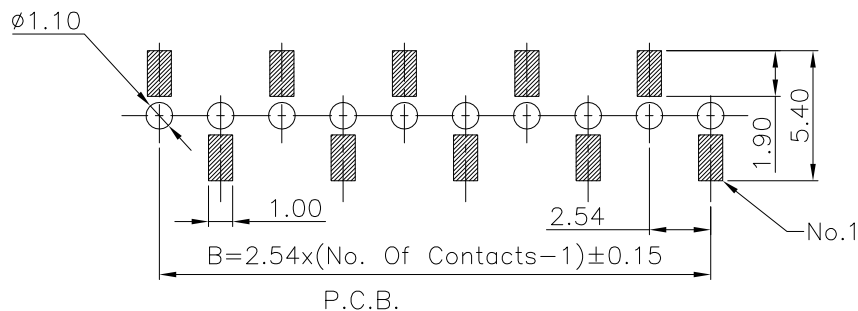



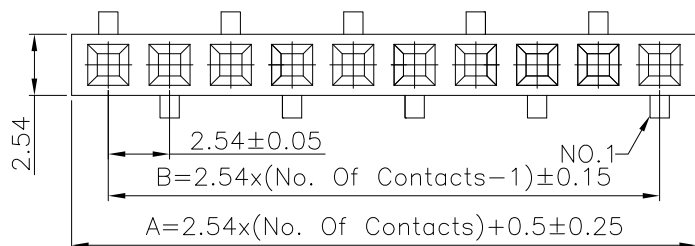

Specifications:

Current Rating: 3.0A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 20m ohm. max.

Insulation Resistance: 1000M ohm. min.

Withstanding Voltage: 600V AC For One Minute

Operating Temperature Range: -40°C to +105°C

Material and Finish

Insulator: High Temp Plastic (Nylon 9T UL94V-0)

Insulator Color: Black

Terminal: Phosphor Bronze

Finish: Gold/Tin/Selective Gold Plated

Dimension:

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B
2	5.58	2.54	9	23.36	20.32	16	41.14	38.10
3	8.12	5.08	10	25.90	22.86	17	43.68	40.64
4	10.66	7.62	11	28.44	25.40	18	46.22	43.18
5	13.20	10.16	12	30.98	27.94	19	48.76	45.72
6	15.74	12.70	13	33.52	30.48	20	51.30	48.26
7	18.28	15.24	14	36.06	33.02			
8	20.82	17.78	15	38.60	35.56			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-Z50X-1XxxR-LF
SERIES
BOTTOM ENTRY SMT
LEADFREE
R TYPE FOOT
1X02:02WAY
1X20:20WAY
NON POST
HIGH 5.0mm

DESCRIPTION: 2.54mm PCB Socket 5.0mm Height SMD Type