
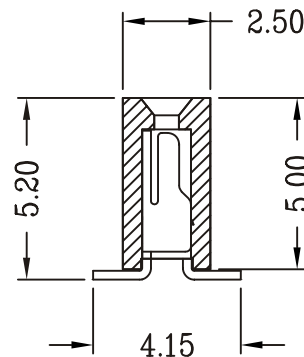
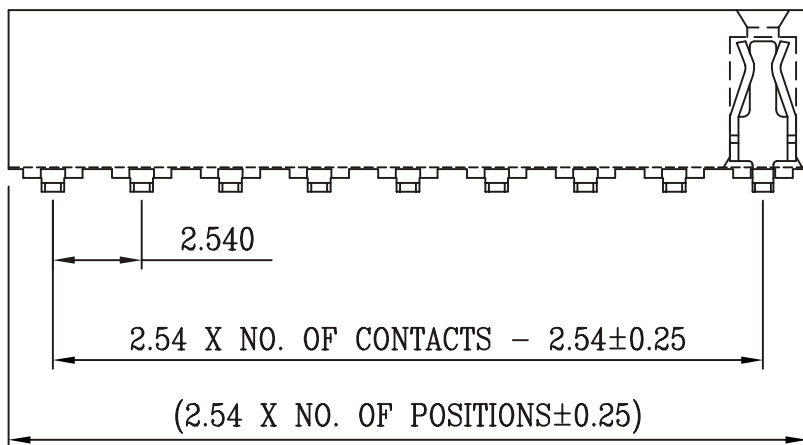


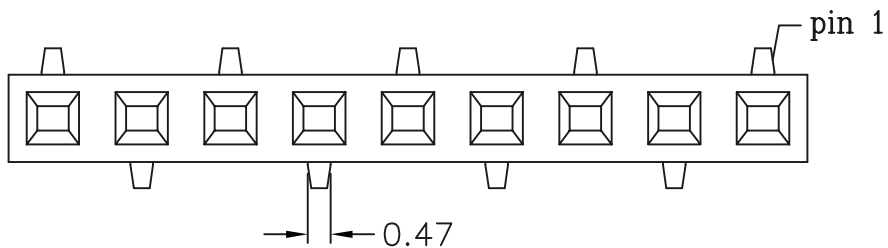

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC

CONTACT RESISTANCE: 20m OHMS MAX.


OPERATING TEMPERATURE: -25°C ~ +85°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

F-Z52X-1XxxL-LF
LEADFREE
RoHS Compliant

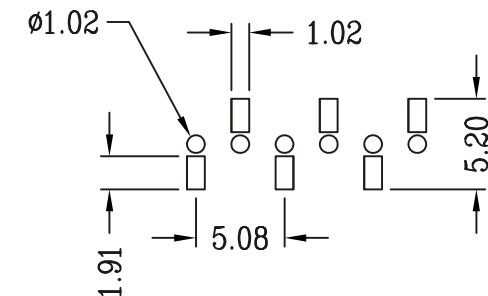

RECOMMENDED P.C.B LAYOUT

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. F-Z52X-1XxxL

DWG NO. F-Z52X-1XxxL

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±
.XX ±
.XXX ±
AWG

DESCRIP TION: 2.54mm Female Socket single Row SMD type (H=5.2)

AREA

REVISIONS

HK

DATE

煜倫股份有限公司