

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F


E

D

C

B

A

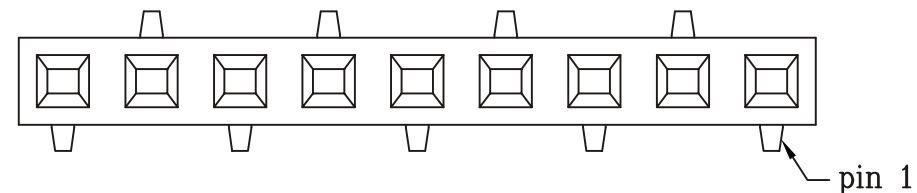

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC



CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -25°C ~ +85°C


MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

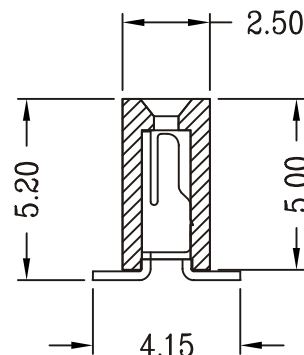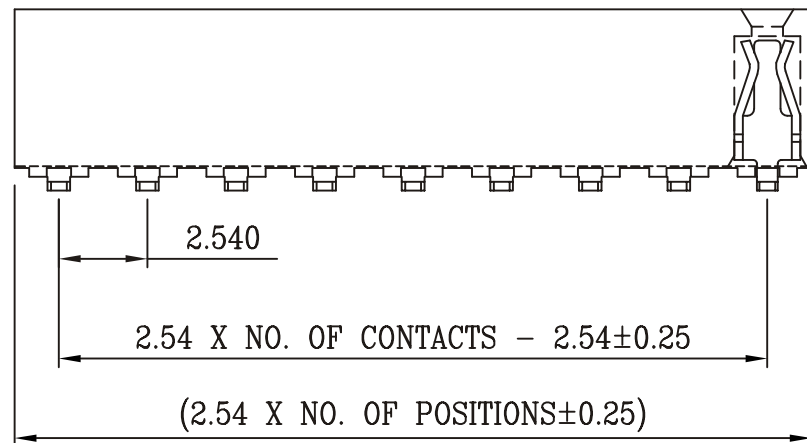

F-Z52X-1XxxR-LF
LEADFREE
RoHS Compliant

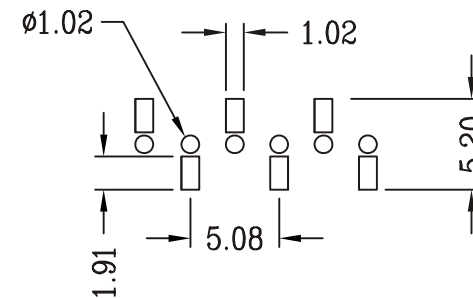

RECOMMENDED P.C.B LAYOUT

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. F-Z52X-1XxxR

DWG NO. F-Z52X-1XxxR

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±

.XX ±

.XXX ±

AWG

DESCRIP TION: 2.54mm Female Socket single Row SMD type (H=5.2)

AREA

REVISIONS

HK

DATE

煜倫股份有限公司