
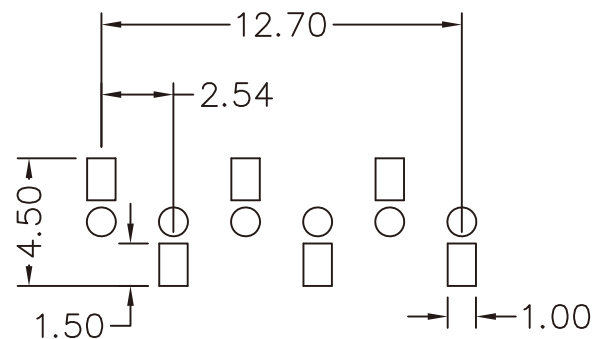
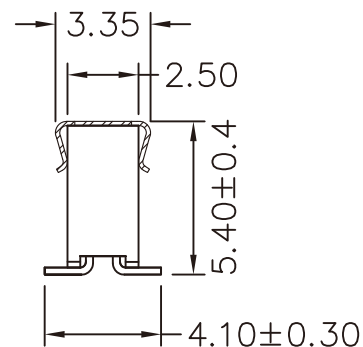


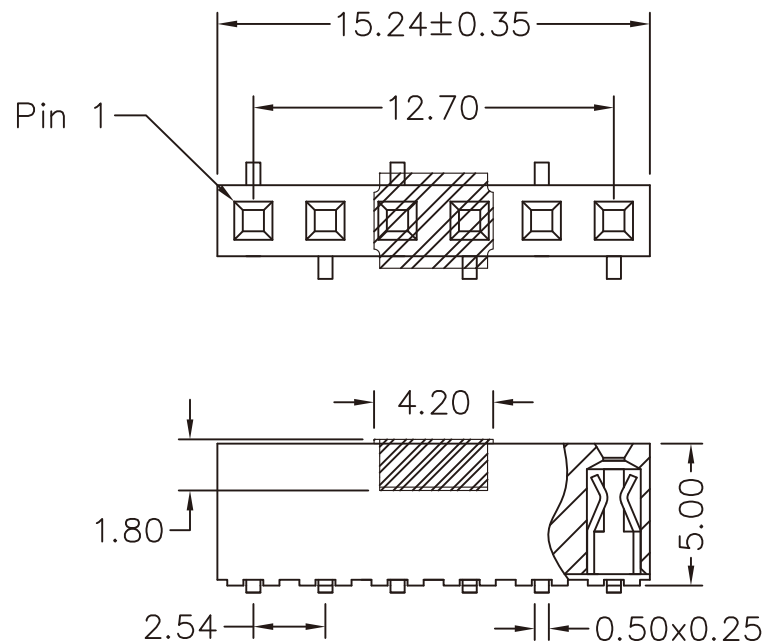

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphar Bronze

SPECIFICATION

Current Rating : 3 AMP

Insulation Resistance : 500MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Withstanding : 600 VAC

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

ORDER INFORMATION

F-Z52XC-1X06R-LF
SERIES
BOTTOM ENTRY SMT
CAP 06 WAY
NON POST
HIGH 5.2mm
LEADFREE
R TYPE FOOT

DESCRIPTION: