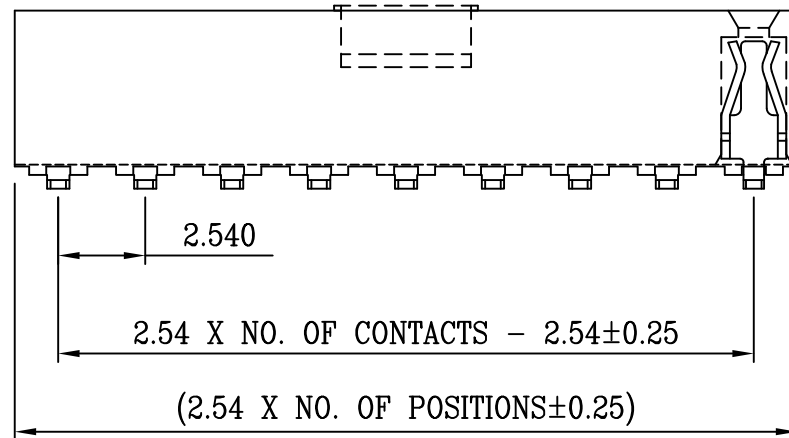
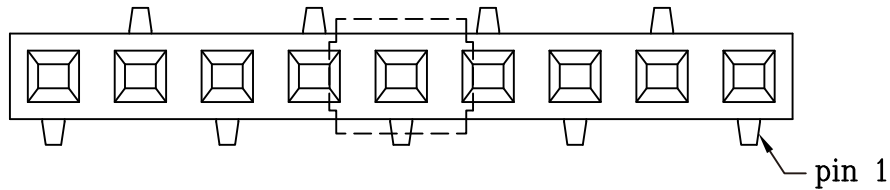


SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC


CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -25°C ~ +85°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

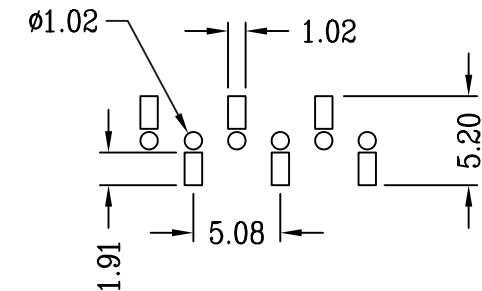

RECOMMENDED P.C.B LAYOUT

F-Z52XC-1XxxR-LF

1X03:03WAY

LEADFREE

1X40:40WAY

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. F-Z52XC-1XxxR

DWG NO. F-Z52XC-1XxxR

FILE NO.

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ± 0.50

.X ± 0.35

.XX ± 0.25

.XXX ± 0.05

ANG

DESCRIPTION: 2.54mm Female Socket single Row SMD type (H=5.2)

AREA

REVISIONS

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1