


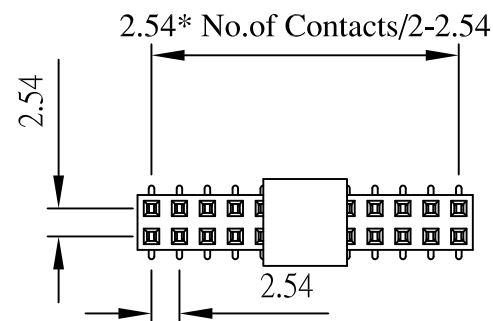


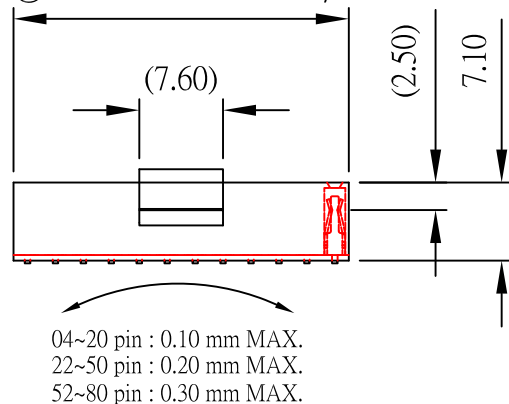


②: 2.54*No.of Contacts/2

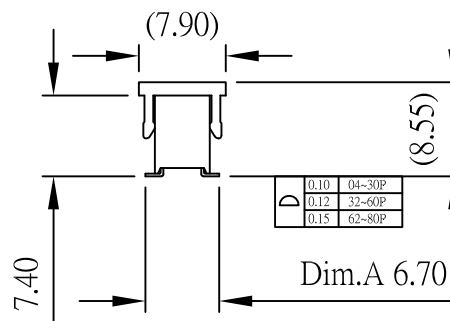

04~20 pin : 0.10 mm MAX.
22~50 pin : 0.20 mm MAX.
52~80 pin : 0.30 mm MAX.

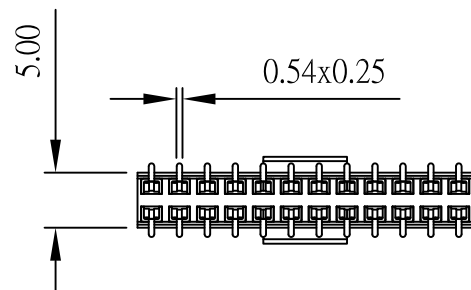

Current Rating and voltage: 3 Amps 250V(r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 1000 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Plastic, UL 94V-0
Finish: Standard: Gold Flash all over

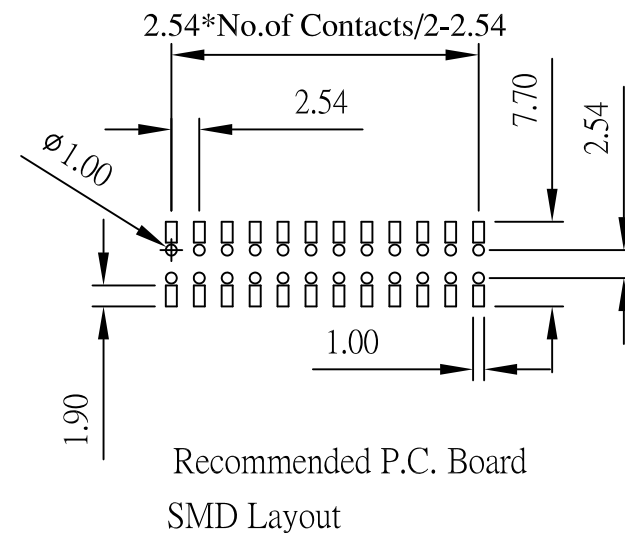

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

F-Z74XC-2Xxx-LF

SERIES
BOTTOM ENTRY SMT
CAP
NON POST
HIGH 7.4mm
LEADFREE
2X02:04WAY
2X40:80WAY

DESCRIPTION: