
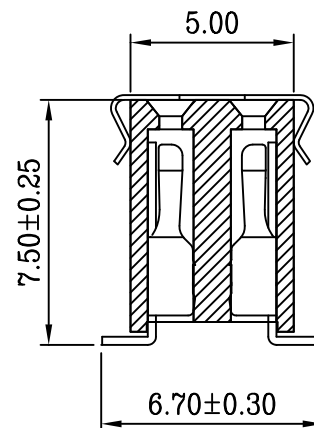
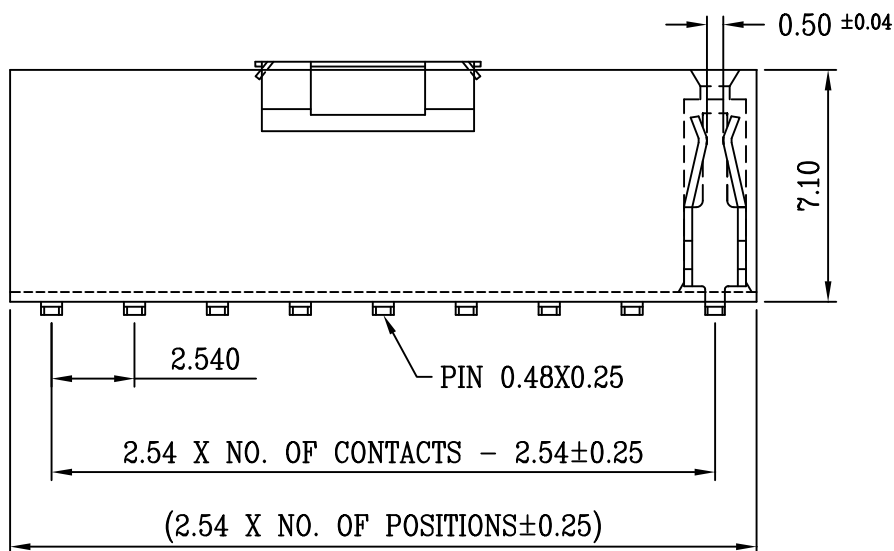


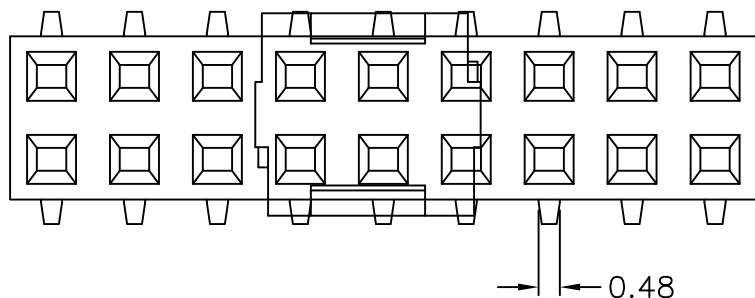

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC


CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -40°C ~ +105°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

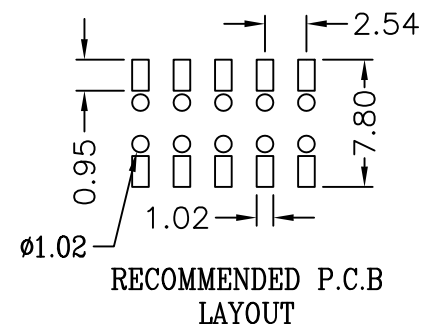

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-Z75XCR-2Xxx-LF
SERIES
BOTTOM ENTRY SMT
HIGH 7.5mm
LEADFREE
2X02:04WAY
2X40:80WAY
REEL
CAP
NON POST

DESCRIPTION: 2.54mm Female Socket Dual Row SMD type (H=7.5)

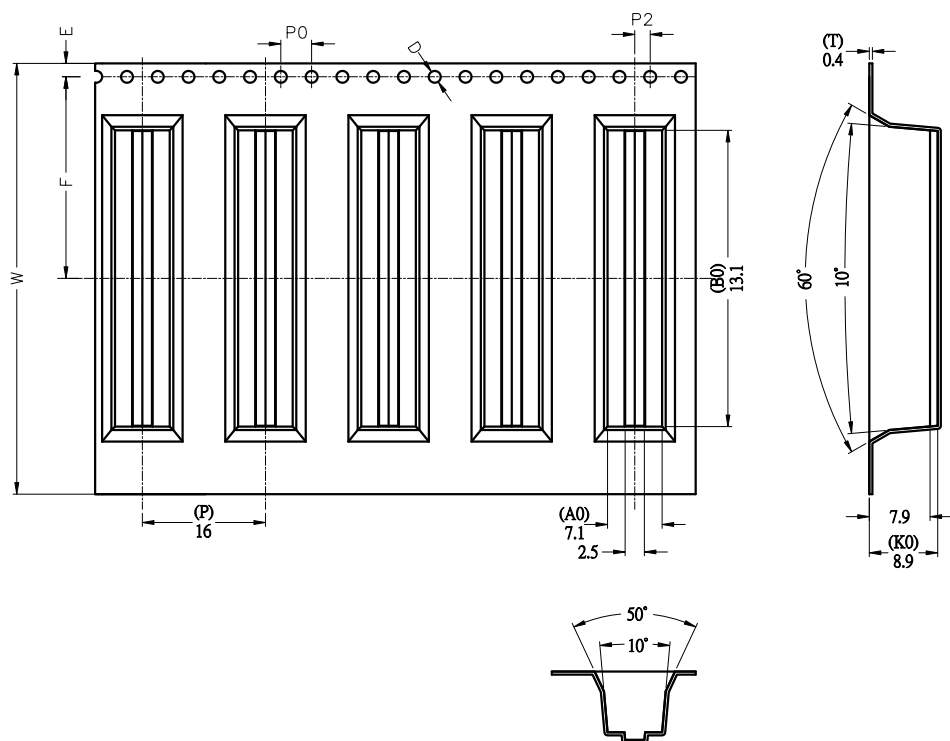

- 1.10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
- 2.Carrier camber not to exceed 1mm in 100mm.
- 3.A₀ and B₀ measured on a plane 0.3mm above the bottom of the pocket.
- 4.K₀ measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- 5.All dimensions meet EIA-481-C requirements.
- 6.Material: Black Anti-static Polystyrene.
- 7.Thickness: $0.40 \pm 0.05\text{ mm}$.
- 8.Packing length per 22" reel : 25 Meters.
- 9.Component loaded per 13" reel : 450 pcs. (Core 4")

ITEM	W	A ₀	B ₀	K ₀	K ₁	P	F	E	D	D ₁	P ₀	P ₂
DIM	24.0 ^{+0.30} _{-0.30}	7.10 ^{+0.30} _{-0.10}	13.1 ^{+0.30} _{-0.10}	8.90 ^{+0.30} _{-0.10}	0.00 ^{+0.30} _{-0.10}	16.0 ^{+0.10} _{-0.10}	11.5 ^{+0.15} _{-0.15}	1.75 ^{+0.10} _{-0.10}	1.50 ^{+0.10} _{-0.00}	0.00 ^{+0.25} _{-0.00}	4.00 ^{+0.10} _{-0.10}	2.00 ^{+0.15} _{-0.15}

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-Z75XCR-2Xxx-LF
SERIES
BOTTOM ENTRY SMT
HIGH 7.5mm
REEL
CAP
NON POST
LEADFREE
2X02:04WAY
2X40:80WAY

DESCRIPTION: 2.54mm 2x15pin