
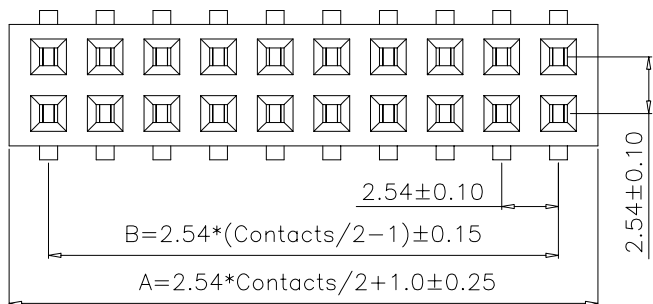


Specifications:

Current rating: 3.0A AC, DC
 Voltage rating: 250V AC, DC
 Contact resistance: 20m ohm max.
 Insulation resistance: 1,000M ohm min.
 Withstanding voltage: 600V AC/minute
 Operating Temperature range: -40°C to +105°C
 Material:
 Insulator: High Temp Plastic (Nylon 6T UL94V-0)
 Standard Color: Black
 Contact: Phosphor Bronze
 Finish: Gold Plated

Dimension :

Contacts	DIM:(mm)		Contacts	DIM:(mm)		Contacts	DIM:(mm)		Contacts	DIM:(mm)	
	A	B		A	B		A	B		A	B
4	6.08	2.54	24	31.48	27.94	44	56.88	53.34	64	82.28	78.74
6	8.62	5.08	26	34.02	30.48	46	59.42	55.88	66	84.82	81.28
8	11.16	7.62	28	36.56	33.02	48	61.96	58.42	68	87.36	83.82
10	13.70	10.16	30	39.1	35.56	50	64.5	60.96	70	89.90	86.36
12	16.24	12.70	32	41.64	38.10	52	67.04	63.50	72	92.44	88.90
14	18.78	15.24	34	44.18	40.64	54	69.58	66.04	74	94.98	91.44
16	21.32	17.78	36	46.72	43.18	56	72.12	68.58	76	97.52	93.98
18	23.86	20.32	38	49.26	45.72	58	74.66	71.12	78	100.06	96.52
20	26.40	22.86	40	51.8	48.26	60	77.20	73.66	80	102.60	99.06
22	28.94	25.40	42	54.34	50.80	62	79.74	76.20			

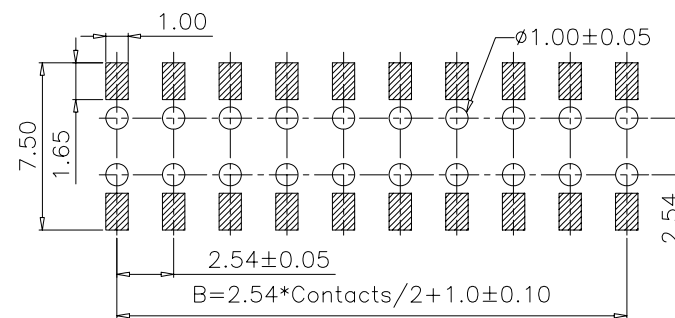

P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

F-Z85X-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 BOTTOM ENTRY SMT NON POST
 HIGH 8.5mm

DESCRIPTION: 2.54mm PCB Socket 8.5mm Height Double Row SMD Type