

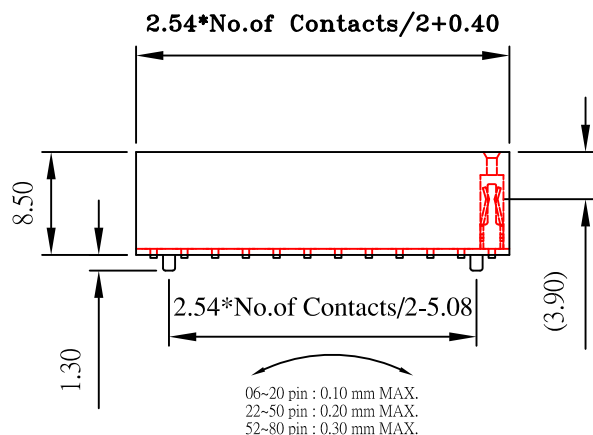
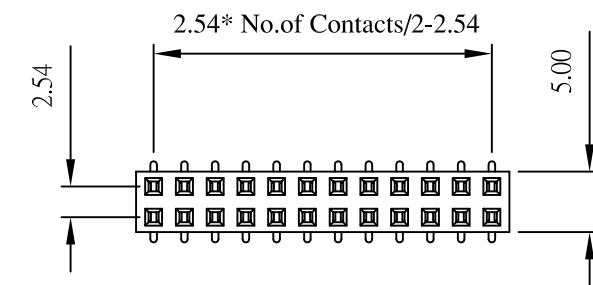


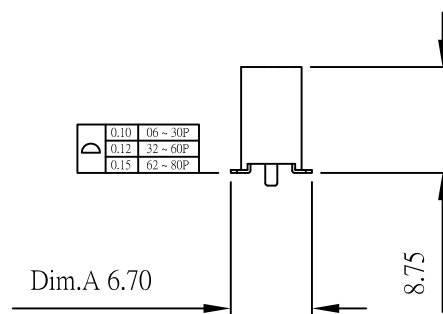


06~20 pin : 0.10 mm MAX.
22~50 pin : 0.20 mm MAX.
52~80 pin : 0.30 mm MAX.

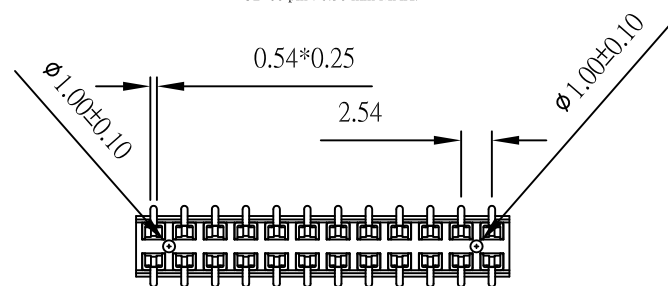

D	0.10	06 ~ 30P
	0.12	32 ~ 60P
	0.15	62 ~ 80P

Current Rating and voltage: 3 Amps 250V(r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 1000 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Plastic,UL 94V-0
Finish: Standard: Gold Flash all over

Recommended P.C. Board
SMD Layout

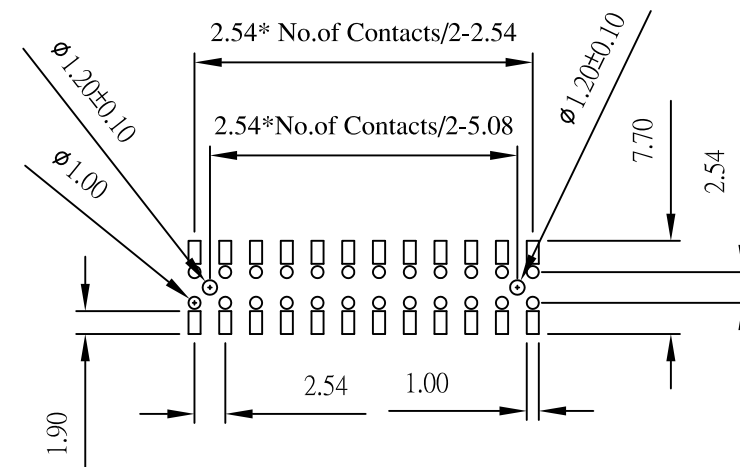

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-Z87P-2Xxx-LF
SERIES
LEADFREE
2X03:06WAY
2X40:80WAY
POST
HIGH 8.75mm
BOTTOM ENTRY SMT

DESCRIPTION: