



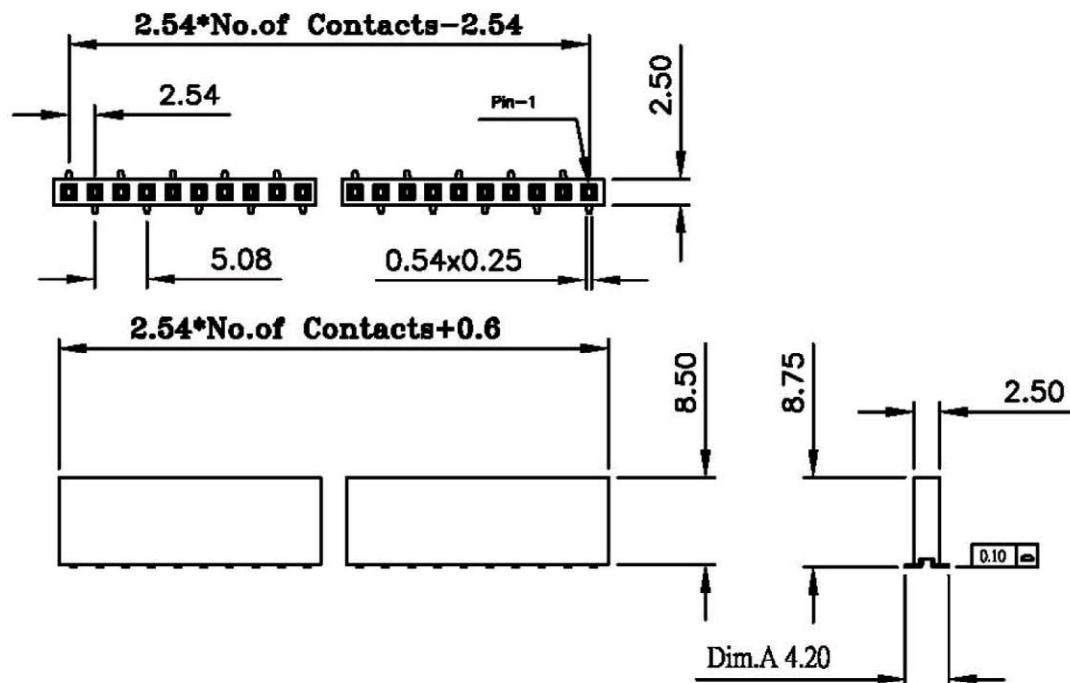

Recommended P.C. Board
SMD Layout

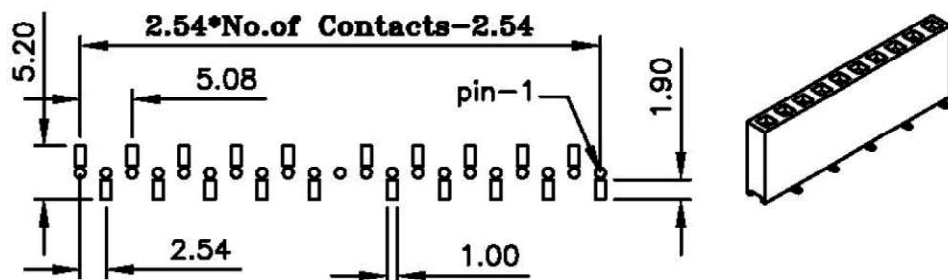

Current Rating and voltage: 3 Amps 250V(r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: $-40^{\circ} \sim +105^{\circ} \text{C}$
 Max Processing Temp: 230°C for 60 seconds
 260°C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: High Temperature Plastic, UL 94V-0

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
 .X $\pm$ 0.25
 .XX $\pm$ 0.15
 .XXX $\pm$ 0.05
 ANG $\pm$

照片框

ORDER INFORMATION

F-Z87X-1XxxR-LF
 SERIES | LEADFREE
 | R TYPE FOOT
 | 1X02:02WAY
 BOTTOM ENTRY SMT | 1X40:40WAY
 HIGH 8.75mm | NON POST

DESCRIPTION: