



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

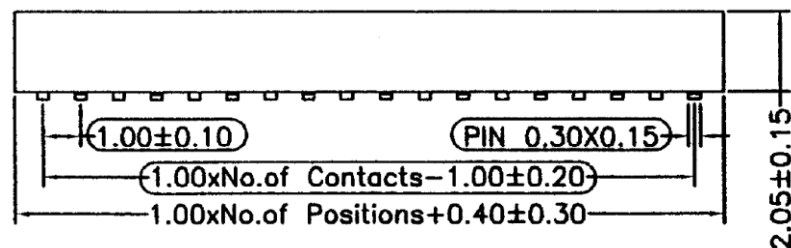

NOTES:

Current Rating: 1.0AMP

Contact Resistance: 20m Ω Max

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000M Ω Min

Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

Contact Material:Phosphor Bronze

Contact plating: Au or Sn over Ni

Insulator Material:PA9T+30%GF UL94V-O

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.40
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$

照片框

ORDER INFORMATION

F10-V22X-1XxxL-LF
SERIES
180 $^{\circ}$ SMT
NON POST
HIGH 2.25mm
LEADFREE
L TYPE FOOT
1X02:02 WAY
1X50:50 WAY

DESCRIPTION: