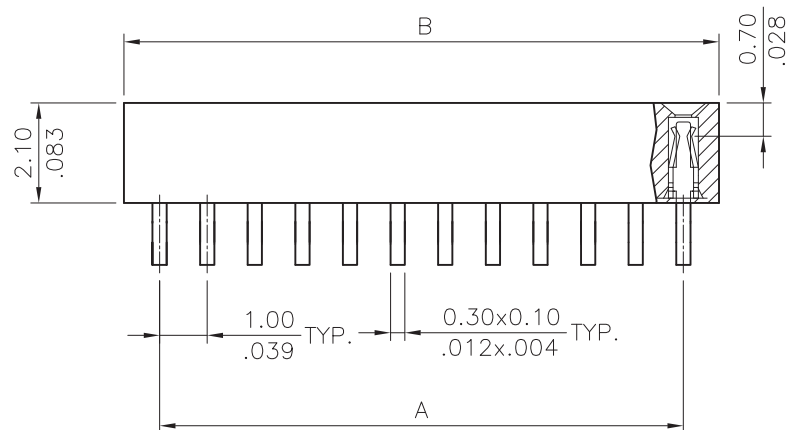


Recommended P.C. Board Layout

Notes:

- * Insulation: LCP, UL 94V-0
- * Contact: Phosphor Bronze
- * For Lead-Free IR Reflow process

$$A = 1.00 * \text{No. of Spaces}$$

$$B = A + 1.50$$

* Available in 2 through 50 circuits

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F10-WX-1Xxx-LF
SERIES | LEADFREE
1X02:02 WAY
1X50:50 WAY
NON POST
90°SMT

DESCRIPTION: