

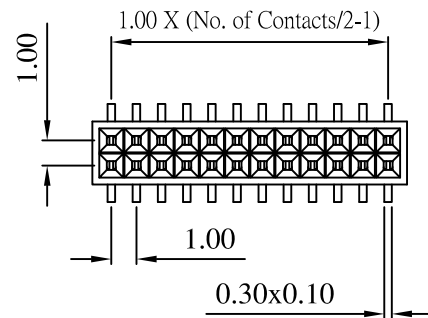


06~70 pin : 0.10 mm MAX.
72~100 pin : 0.20 mm MAX.

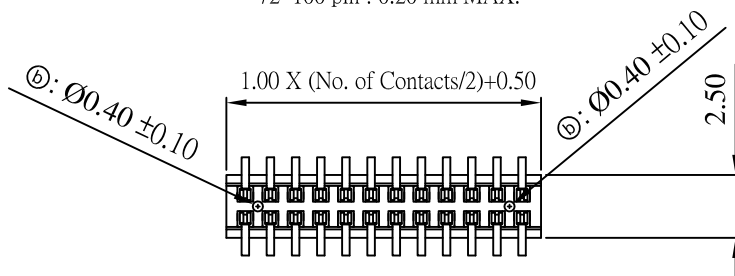


0.10	06~50P
0.12	52~80P
0.15	82~100P

Dim.A 3.90



Current Rating and Voltage : 1 Amps 250V AC (r.m.s)
Insulator Resistance : 1000 Megohms min
Contact Resistance : 20m ohms max
Dielectric Withstanding : 300 V AC
Contact Resistance : 20m Min.
Operating Temperature : - 40° ~ +125° C
Max Processing Temp : 230° C for 60 seconds
Max Processing Temp : 260° C for 10 seconds
Contact Material : Phosphor Bronze
Insulator Material : Polyester,UL 94V-0
Standard : LCP
Finish: Standard: Gold Flash all over

Recommended P.C. Board
SMD Layout

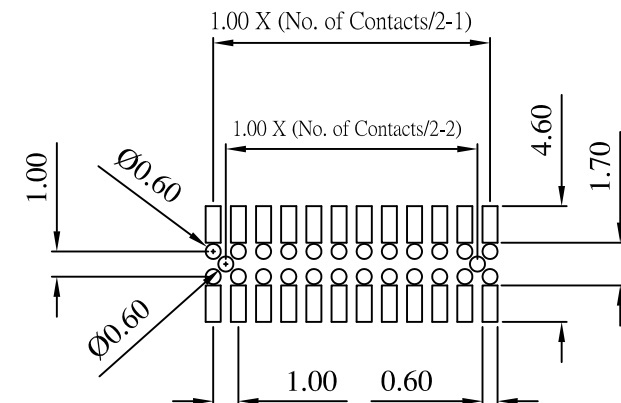

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F10-Z22P-2Xxx-LF
SERIES
LEADFREE
2X03:06WAY
2X50:100WAY
POST
HIGH 2.20mm
BOTTOM ENTRY SMT

DESCRIPTION: