


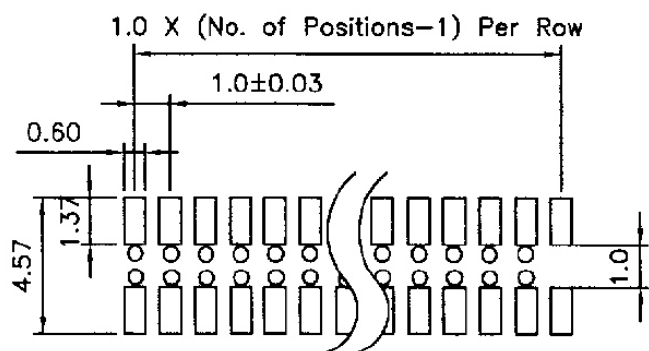
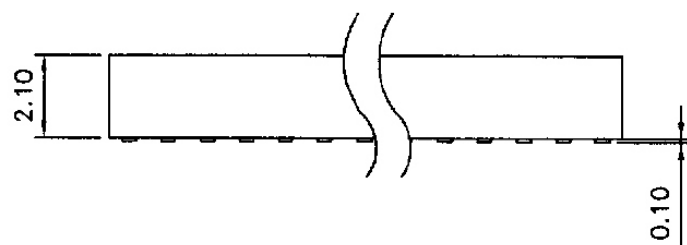
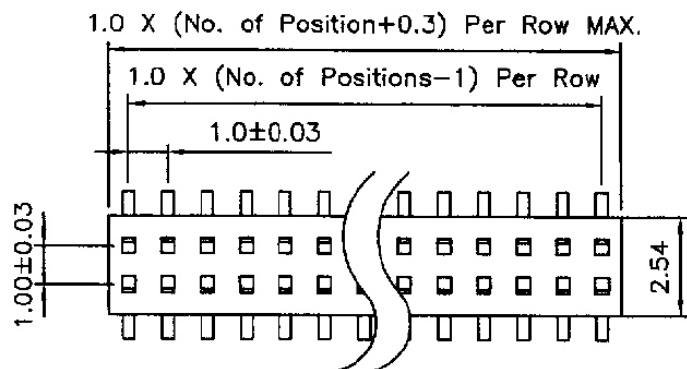




RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: ±0.05mm



Current Rating: 1 Amp
 Insulation Resistance: 1000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40 ° C to +105° C
 Max Processing Temp: 230 ° C for 30 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 ● Standard : NYLON-9T

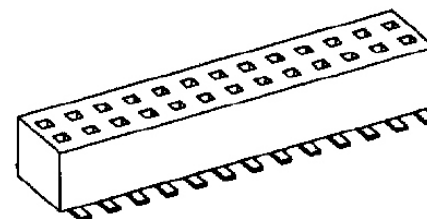

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

F10-Z22X-2Xxx-LF

SERIES

LEADFREE

2X03:06 WAY

2X50:100 WAY

NON POST
HIGH 2.2mm

BOTTOM ENTRY SMT

DESCRIPTION: