




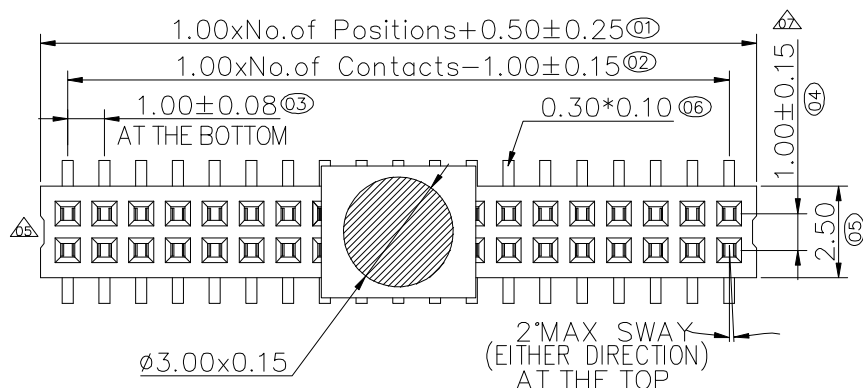


Dim.D	Dim.C	NOTE
3.00mm	3.85mm	03 Pin
4.20mm	3.40mm	04~40Pin

acetate tape



注：02PIN 使用圓形膠布只適合卷裝，
管裝使用會貼在一起

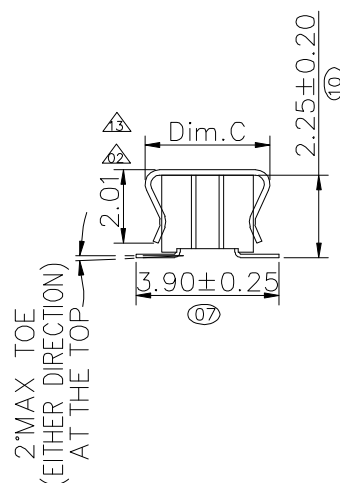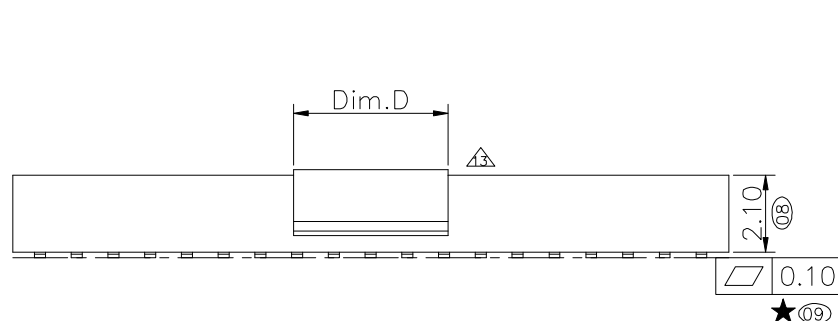

Specifications

Current Rating: 1.0Amp (1)

Insulation Resistance: 1000MΩMin. (1)

Dielectric Withstanding Voltage: 300VAC (1)

Contact Resistance: 20mΩMax. (1)

Operating Temperature: -40°C to +105°C

Max Process Temp: 230°C for 30~60 sec.


Materials

Contact Material: Phosphor Bronze

(1) Insulator Material: High Temperature

(1) Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.Board
Layout For Bottom Entry
(Tolerance: ±0.05)

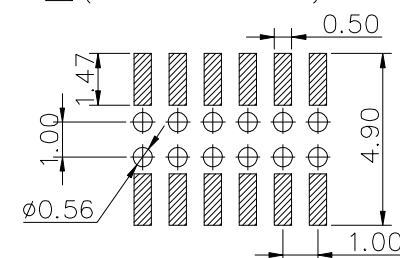

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

F10-Z22XC-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X40:80WAY

BOTTOM ENTRY SMT

CAP

NON POST

HIGH 2.25mm

DESCRIPTION: 1.00 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR