

J

I

H

G

F


E

D

C

B

A

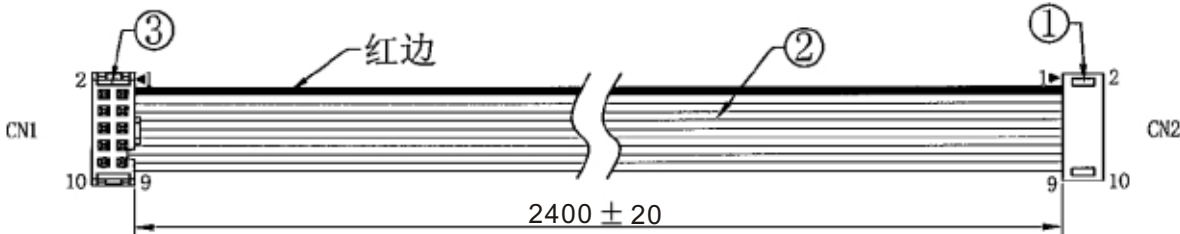

加工说明:
接点一一对应.

- 测试设定:
- 1. 导通阻抗小于2Ω.
 - 2. 短/断路判定20KΩ.
 - 3. 在DC=300V的情况下, 绝缘阻抗不小于20MΩ.
 - 4. 测试环境:温度25±5℃, 湿度:50% RH以下.

4	珍珠泡沫 环保ROHS	1	PCS
3	101-10P 二件式 有凸(H) 黑色 环保ROHS Pitch:2.54mm	1	Set
2	UL2651#28-1.27-SC-10C 红边 环保ROHS(NS-TC-G00020-N)	2412	mm
1	601-10P(H) 二件式 环保ROHS Pitch:2.54mm	1	Set
序号	品名规格	用量	单位

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO.F2IP01-1010BS-A2M4		RoHS Compliant						
DWG NO. F2IP01-1010BS-A2M4		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:				
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE	

煜倫股份有限公司