

J

I

H

G

F


E

D

C

B

A

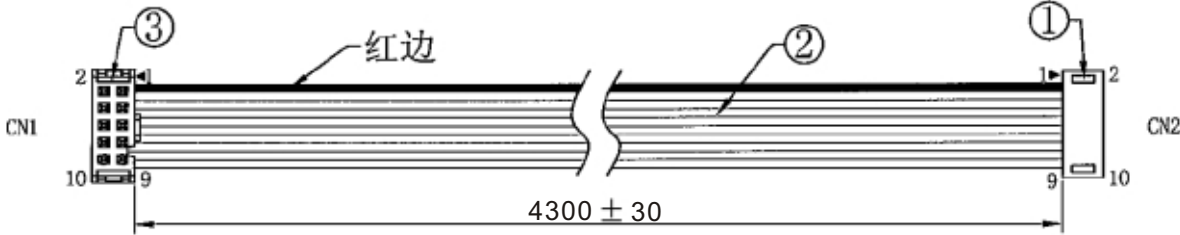

加工说明:

接点一一对应.

测试设定:

- 1. 导通阻抗小于2Ω.
- 2. 短/断路判定20KΩ.
- 3. 在DC=300V的情况下, 绝缘阻抗不小于20MΩ.
- 4. 测试环境: 温度25±5℃, 湿度: 50% RH以下.

|    |                                                 |      |     |
|----|-------------------------------------------------|------|-----|
| 4  | 珍珠泡沫 环保ROHS                                     | 1    | PCS |
| 3  | 101-10P 二件式 有凸(H) 黑色 环保ROHS Pitch:2.54mm        | 1    | Set |
| 2  | UL2651#28-1.27-SC-10C 红边 环保ROHS(NS-TC-G00020-N) | 2412 | mm  |
| 1  | 601-10P(H) 二件式 环保ROHS Pitch:2.54mm              | 1    | Set |
| 序号 | 品名规格                                            | 用量   | 单位  |

RoHS Compliant



|                            |           |                                                                                                  |                                                      |               |           |    |      |  |
|----------------------------|-----------|--------------------------------------------------------------------------------------------------|------------------------------------------------------|---------------|-----------|----|------|--|
| PART NO.F2IP01-1010BS-A4M3 |           | RoHS Compliant                                                                                   |                                                      |               |           |    |      |  |
| DWG NO. F2IP01-1010BS-A4M3 |           | CHECKED BY CY                                                                                    | TOLERANCES ARE<br>.X ± 0.2<br>.XX ±<br>.XXX ±<br>AWG | DESCRIP TION: |           |    |      |  |
| FILE NO.                   |           | DRAWING BY                                                                                       |                                                      |               |           |    |      |  |
| UNIT / mm                  | SCALE 1:1 | PROJECTION  |                                                      | AREA          | REVISIONS | HK | DATE |  |

煜倫股份有限公司