


WIRING DIAGRAM

P1	COLOR	P2
1	棕	剝鍍4mm
2	紅	剝鍍4mm
3	橙	剝鍍4mm
4	黃	剝鍍4mm
5	綠	剝鍍4mm
6	藍	剝鍍4mm
7	紫	剝鍍4mm
8	灰	剝鍍4mm
9	白	剝鍍4mm
10	黑	剝鍍4mm
11	棕	剝鍍4mm
12	紅	剝鍍4mm
13	橙	剝鍍4mm
14	黃	剝鍍4mm
15	綠	剝鍍4mm
16	藍	剝鍍4mm

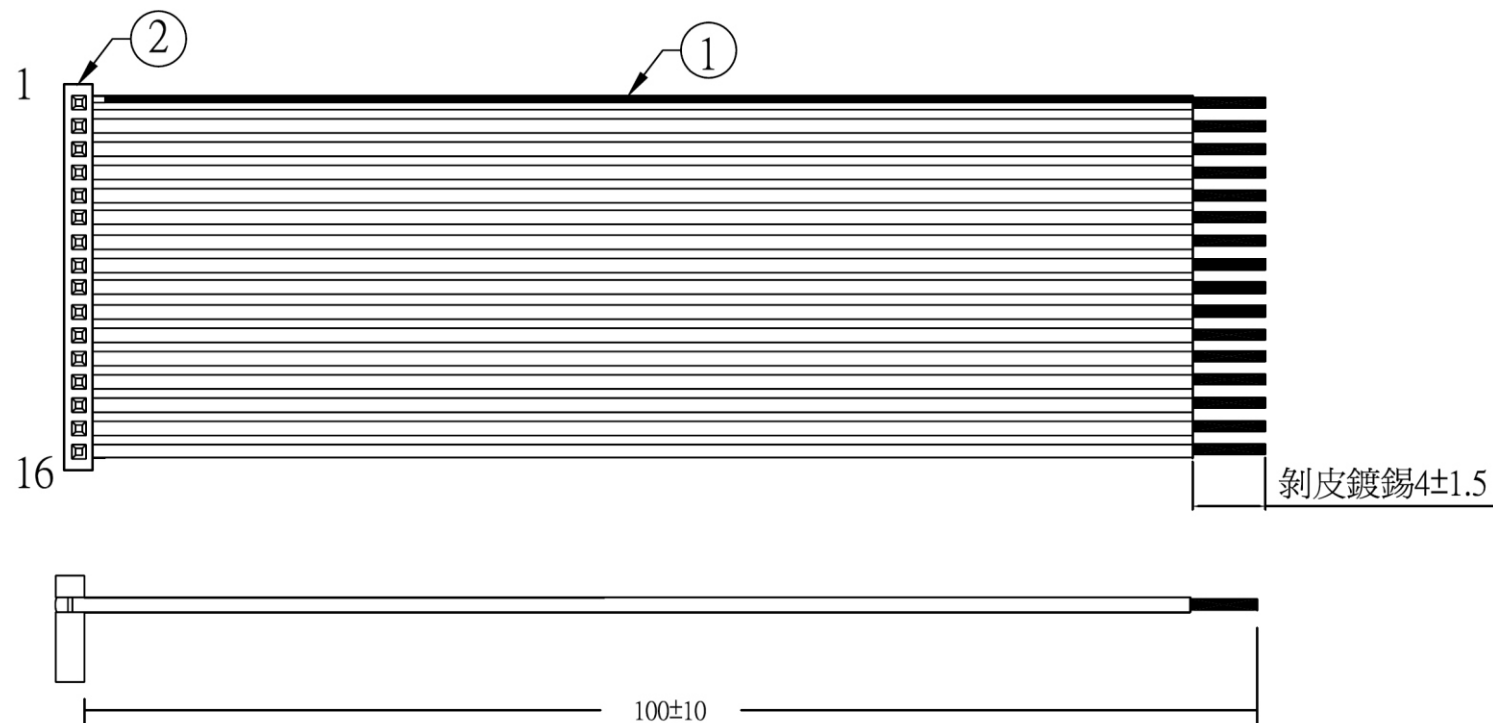

2	單排IDC SOCKET 16P	1	PBT+G.F BLACK
1	彩虹排線(剝皮鍍錫) 2.54mm 16P	1	PVC L=110mm
ITEM	DESCRIPTION	Q'TY	REMARK

REMARKS :

- 100% OPEN/SHORT TEST.
- DC TEST 300v/10ms.
- Insulation Resistance:5M OHM/Min.
- Conductance Resistance:5.0 ohm/Max

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F2X1-A1600-F10C-LF
SERIES LEADFREE
100mm
FEMALE
1 ROW 16WAY

DESCRIPTION: