
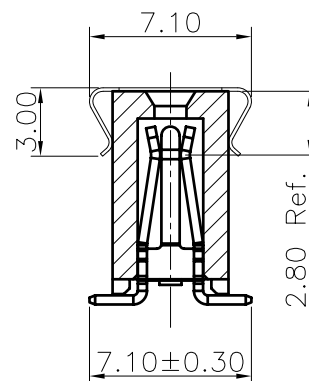
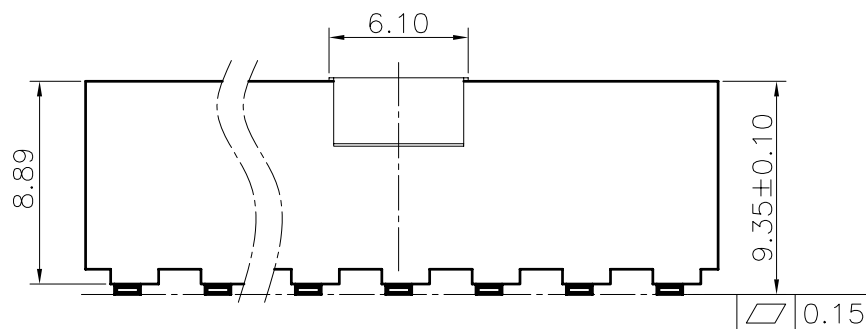



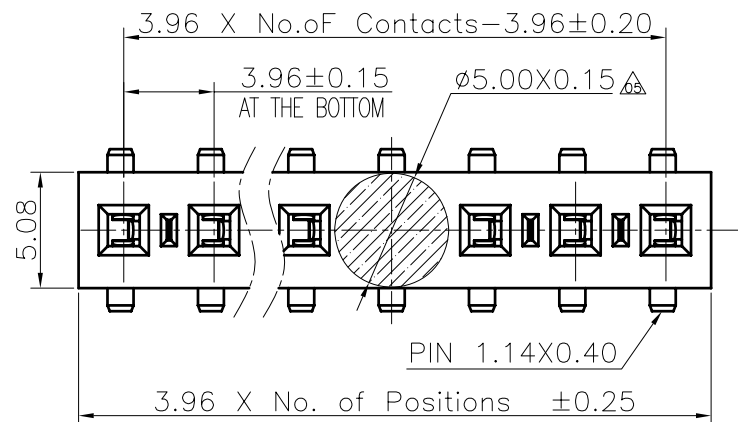

Specifications

Current Rating:7.9Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:1000VAC

Contact Resistance:20mΩMax.


Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

△ Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.Board
FOR TOP Layout
(Tolerance:±0.05)

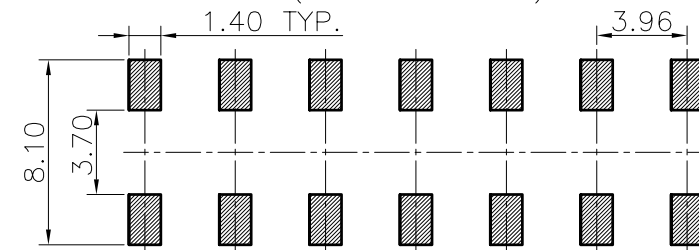

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F39-V93XC-1XxxB-LF
SERIES
180°SMT
HIGH 9.35mm
LEADFREE
BOTH TAIL
1X02:02 WAY
1X24:24 WAY
CAP
NON POST

DESCRIPTION: 3.96 PITCH POWER SOCKETS SMT TYPE CONNECTOR