
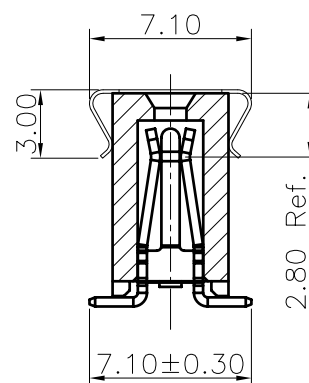
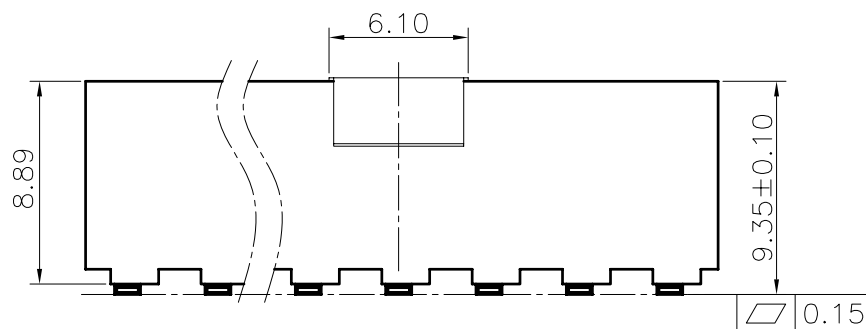



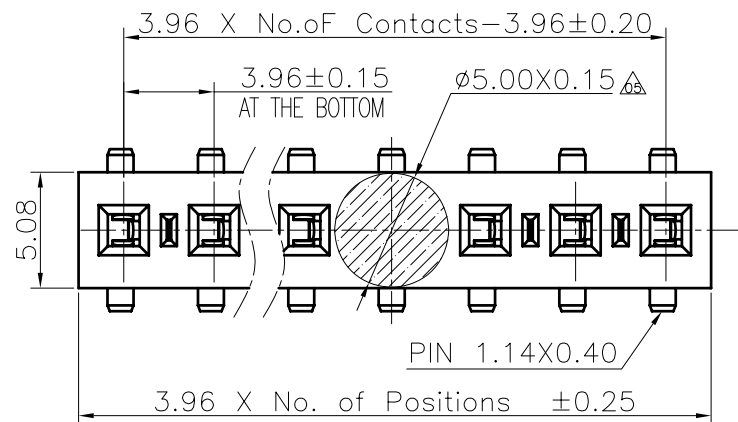

### Specifications

Current Rating:7.9Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:1000VAC

Contact Resistance:20mΩMax.


Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

△ Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

### RECOMMENDED P.C.B LAYOUT FOR BOTTOM ENTRY (Tolerance:±0.05)

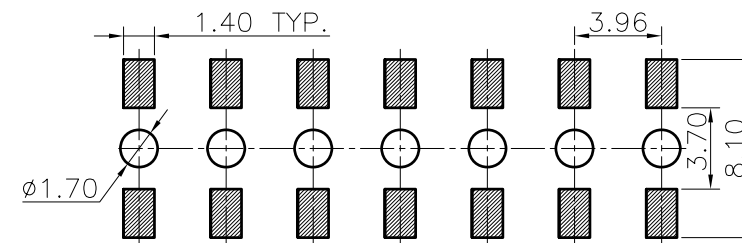

### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

### ORDER INFORMATION

F39-Z93XC-1XxxB-LF

SERIES

LEADFREE

BOTH TAIL

1X02:02 WAY

1X24:24 WAY

BOTTOM ENTRY SMT  
HIGH 9.35mm

CAP

NON POST

DESCRIPTION: 3.96 PITCH POWER SOCKETS SMT TYPE CONNECTOR