


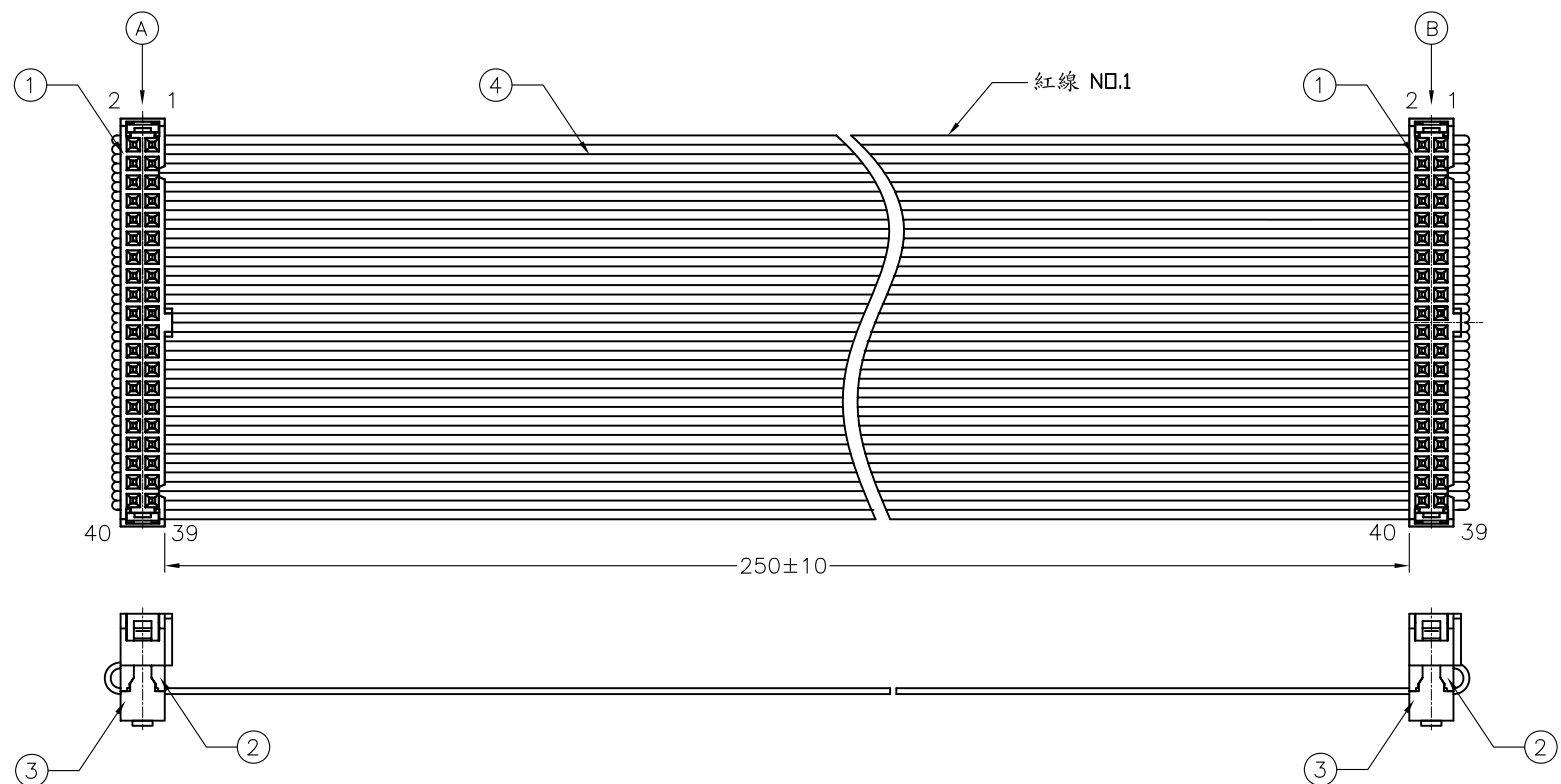

備註:

1.材質:

序號	品名	數量
1	IDC SOCKET 40P 黑色有鼻不塞孔膠芯成品	2
2	IDC SOCKET 40P 黑色中蓋	2
3	IDC SOCKET 40P 黑色反折蓋	2
4	UL2651 28AWG 40C PH1.27 FLAT CABLE L=280	1

2.電氣性質:

- 2.1 耐高壓:電壓 200VDC 測量時間0.01秒 測量規格20MΩ
2.2 短斷路判定值:20 KΩ
2.3 導通阻抗:1 Ω

3.點位設定

001: A01---B01
002: A02---B02
003: A03---B03
:
:
:
038: A38---B38
039: A39---B39
040: A40---B40

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. F3X2-4040-F25C

DWG NO. F3X2-4040-F25C

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION:

IDC 40PX2 FLAT CABLE L=250

AREA

REVISIONS

HK

DATE

煜倫股份有限公司