

MATERIAL

Insulator : NYLON 9T

Contact Pin : Phosphor Bronze

SPECIFICATION






Current Rate : 0.75 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

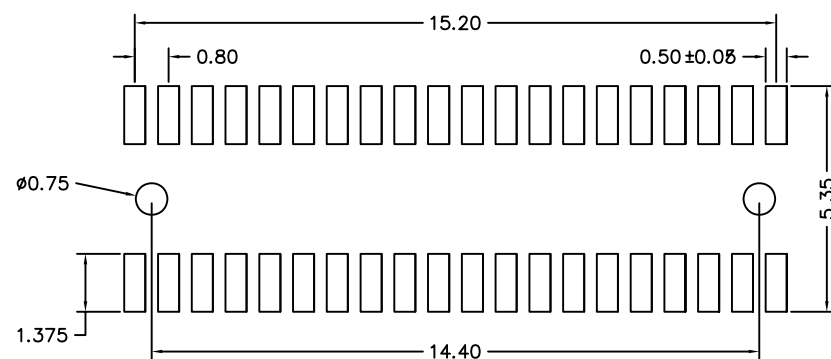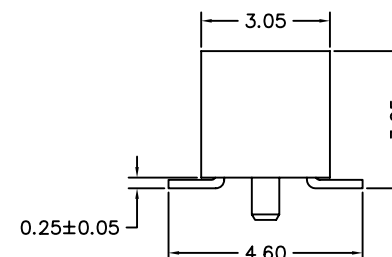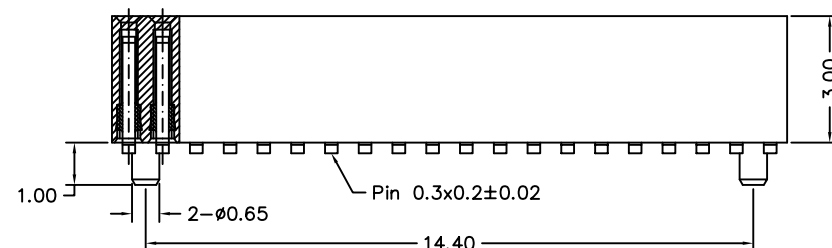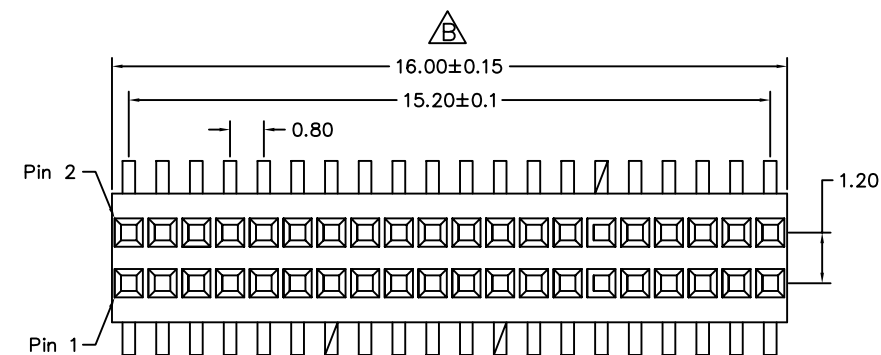

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F8-V33P-2X20-LF
SERIES POST 40 WAY LEADFREE
HIGH 3.25mm
180°SMT

DESCRIPTION:FEMALE HEADER 0.8*1.2mm SMT TYPE, DUAL ROWS HEIGHT 3.0mm