
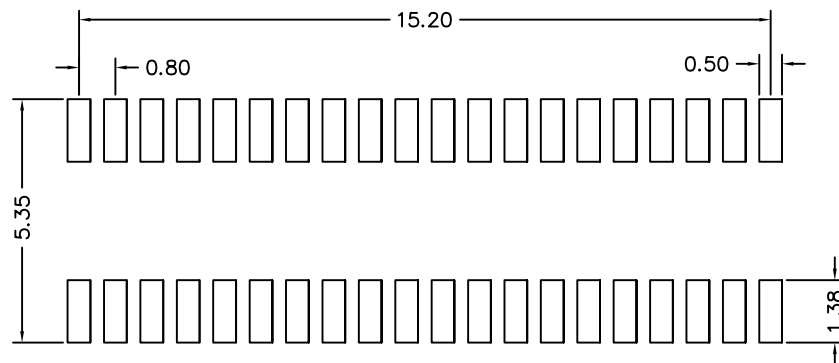
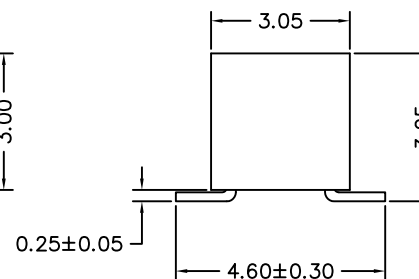
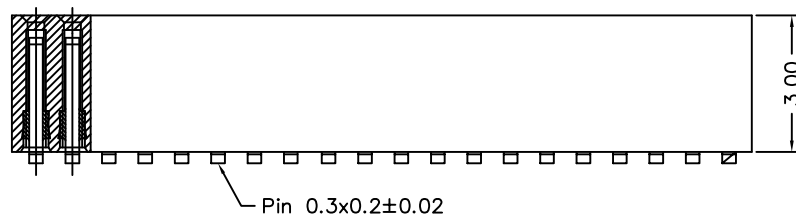



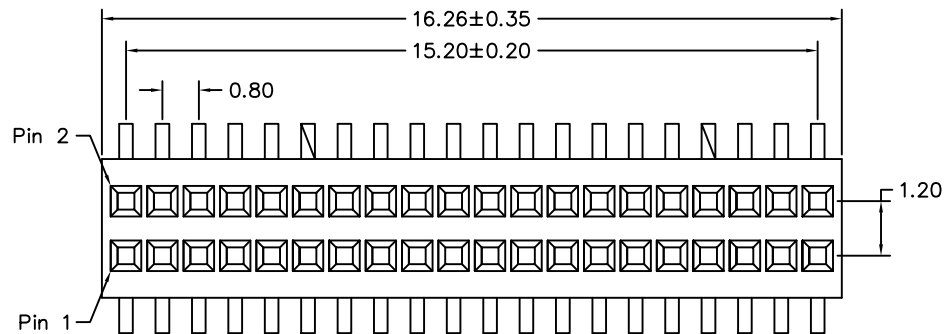

Recommended P.C.B Layout

## MATERIAL

Contact Pin : Phosphor Bronze

## SPECIFICATION

Current Rate : 0.75 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

## RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

## ORDER INFORMATION

F8-V33X-2X20-LF  
SERIES  
LEADFREE  
40 WAY  
NON POST  
HIGH 3.25mm  
180°SMT

DESCRIPTION: