
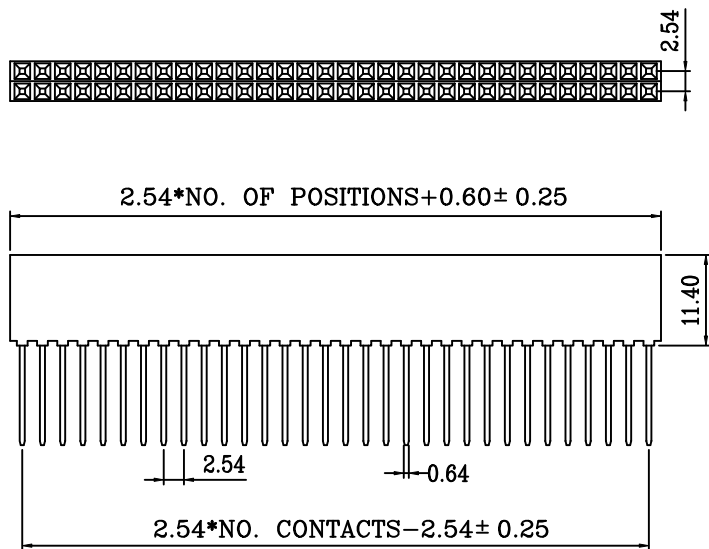


SPECIFICATIONS
 CURRENT RATING: 3 AMPS
 INSULATOR RESISTANCE: 5000 MEGPHMS MIN.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING: AC 500V
 OPERATING TEMPERATURE: -25°C ~ +85°C

MATERIAL
 CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)
 INSULATOR: PA-9T, UL 94V-0

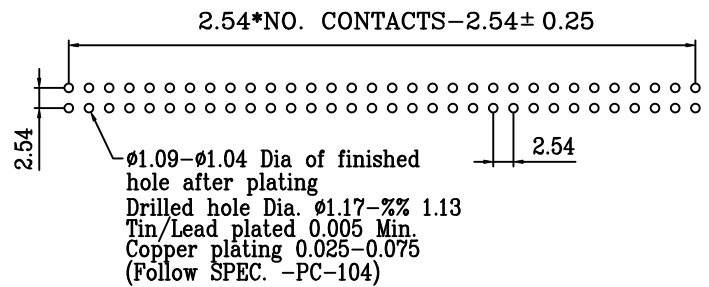

Recommend P.C.B. Layout
TOP View

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

FE-D114121-2Xxx-LF

SERIES
 LEADFREE
 2X02:04WAY
 2X40:80WAY
 DIP 12.19mm
 HIGH 11.40mm
 DIP 180°

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY		X. ± 0.50
CHECKED BY GENIUS		.X ± 0.35
UNIT / mm		.XX ± 0.25
SCALE 1 : 1		.XXX ± 0.05
DATE		ANG ±
SIZE A4	PPOJECTION	