
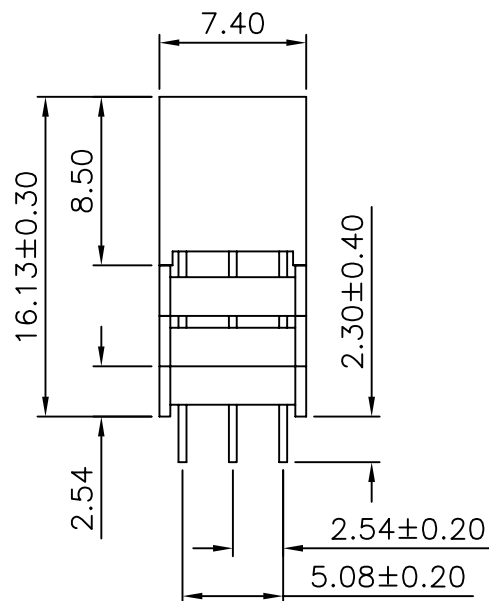
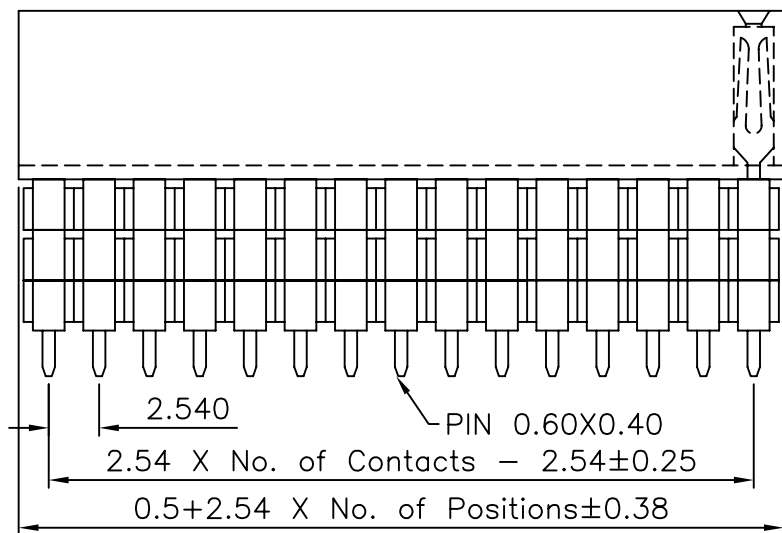


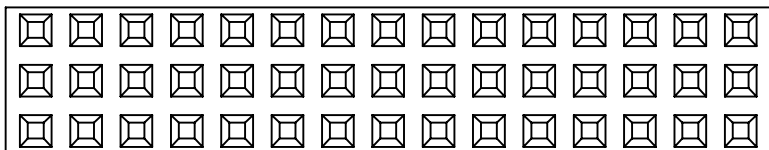

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20m Ω Max.


Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
P.B.T

Recommended P.C.Board Hole Layout

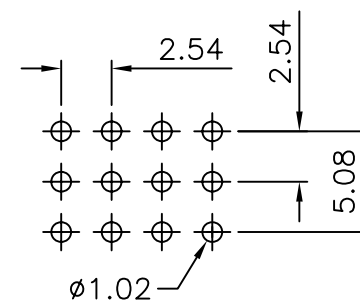

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

照片框

ORDER INFORMATION

FE-D18C-3Xxx-LF

SERIES

LEADFREE

3X02:06WAY

3X40:120WAY

3 BASE

TOTAL HIGH 18.42mm

DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER THREE ROWS DIP TYPE