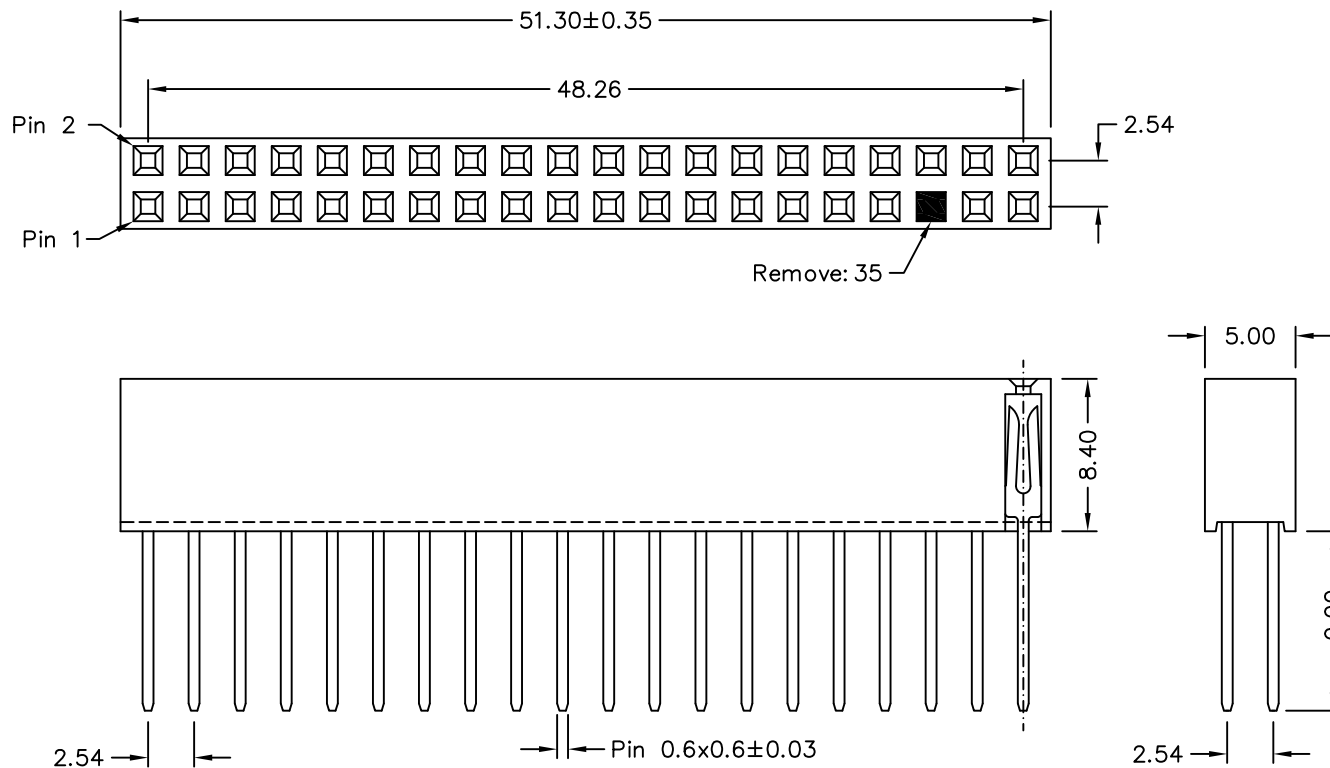


Recommended P.C.B Layout

MATERIAL

Insulator : PBT+30%G.F

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

ORDER INFORMATION

FE-D18X-2X20E35-LF
SERIES
LEADFREE
EMPTY 35 PIN
40 WAY
NON BASE
TOTAL HIGH 18.40mm
DIP 180°

DESCRIPTION: FEMALE HEADER 2.54*2.54mm STRAIGHT TYPE, DUAL ROWS HEIGHT 8.4mm