


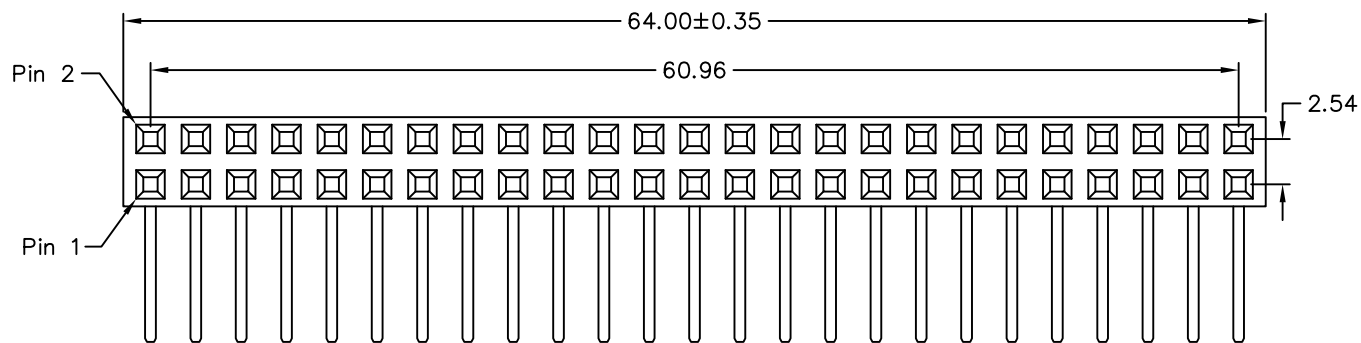

MATERIAL

Contact Pin : Brass




SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : $5000\text{M}\Omega\text{Min.}$

Contact Resistance : $20\text{m}\Omega\text{Max.}$

Dielectric Voltage : AC 500V for one minute

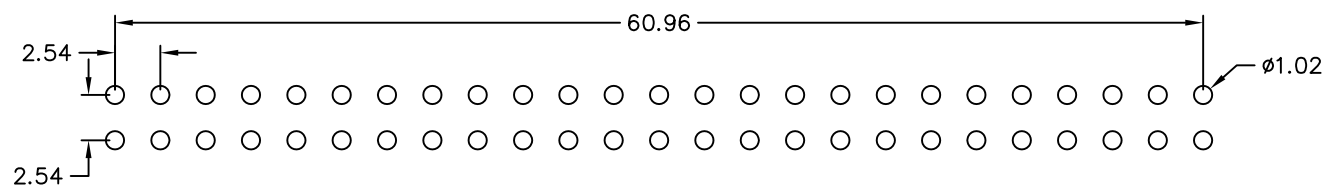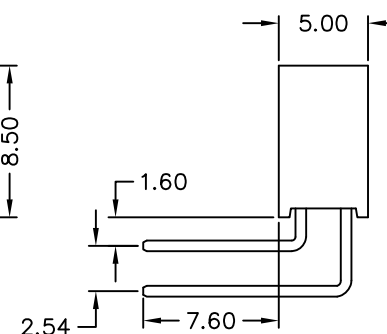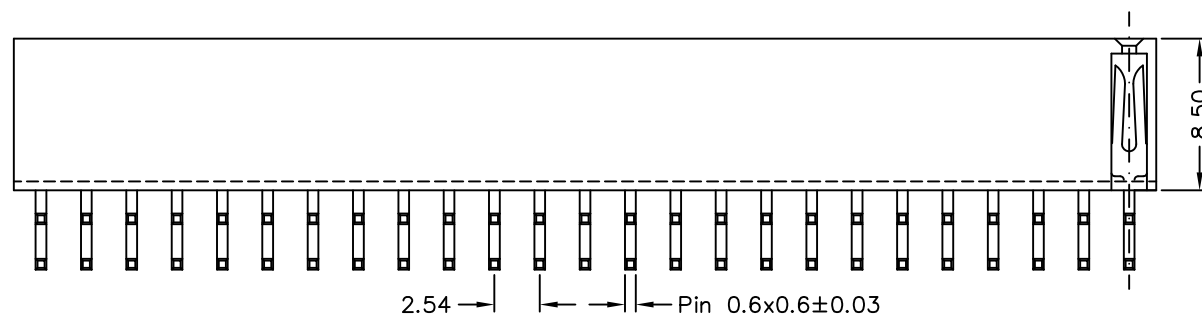

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

FE-R8476-2X25-LF
SERIES
LEADFREE
50 WAY
DIP 7.6mm
HIGH 8.4mm
DIP 90°

DESCRIPTION: FEMALE HEADER 2.54*2.54mm RIGHT ANGLE TYPE, DUAL ROWS HEIGHT 8.5mm,