


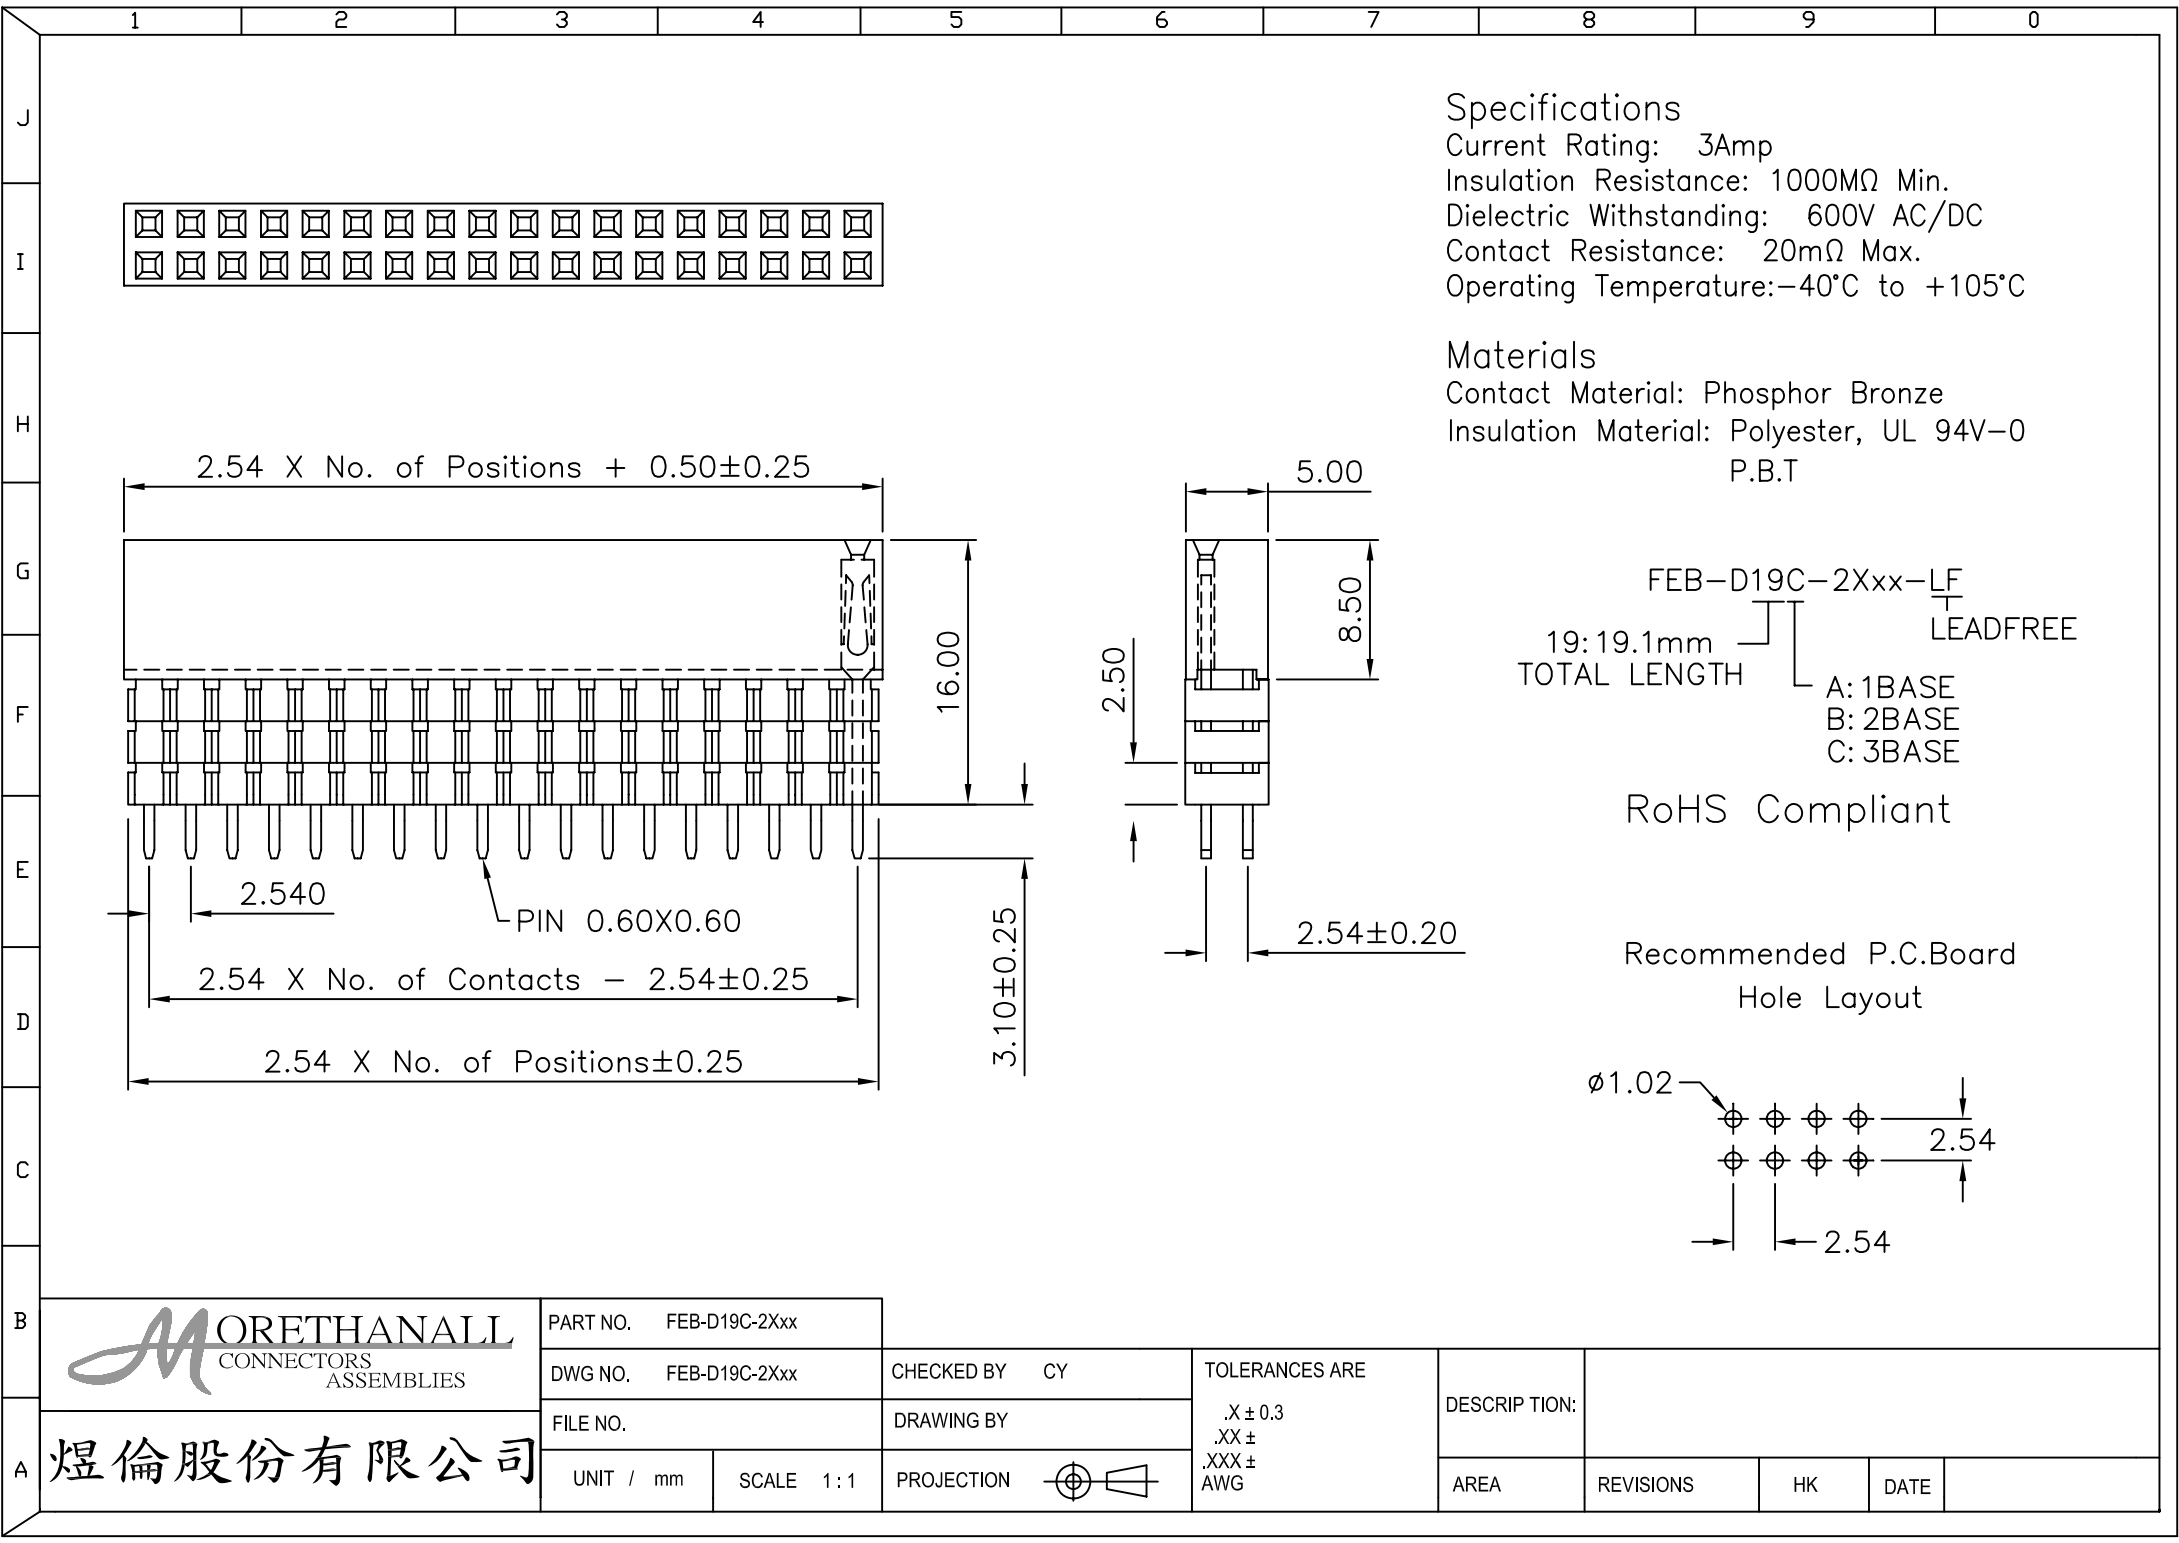

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
P.B.T

FEB-D19C-2Xxx-LF
19: 19.1mm TOTAL LENGTH
LEADFREE
A: 1BASE
B: 2BASE
C: 3BASE

RoHS Compliant

Recommended P.C.Board
Hole Layout

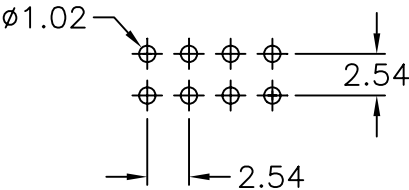

PART NO. FEB-D19C-2Xxx									
DWG NO. FEB-D19C-2Xxx		CHECKED BY CY		TOLERANCES ARE .X ± 0.3 .XX ± .XXX ± AWG	DESCRIP TION:				
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION		AREA	REVISIONS	HK	DATE		

煜倫股份有限公司