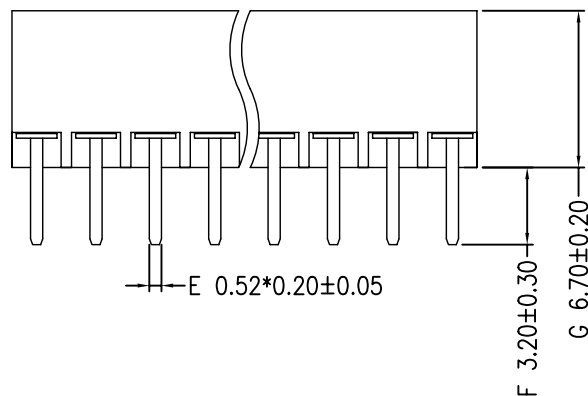

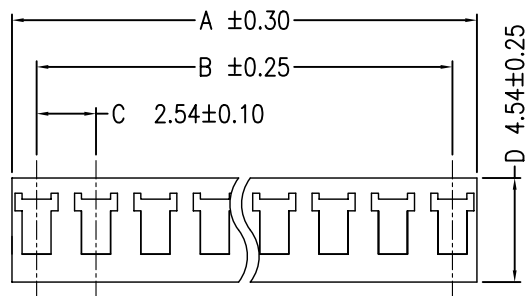


RECOMMENDED PCB LAYOUT

NOTE:

MATERIAL

HOUSING: PBT.
 CONTACT: PHOSPHOR BRONZE.
 PLATING: TIN

ELECTRICAL

CURRENT RATING: 1 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE: 800 VAC MIN.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.

ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO 85°C .

DIMENSIONAL INFORMATION

Circuits	Dimension	
	A	B
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86
11	27.94	25.40
12	30.48	27.94
13	33.02	30.48

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. FFC-D-xx

DWG NO. FFC-D-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.3
 .XX ± 0.2
 .XXX ± 0.1
 AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司