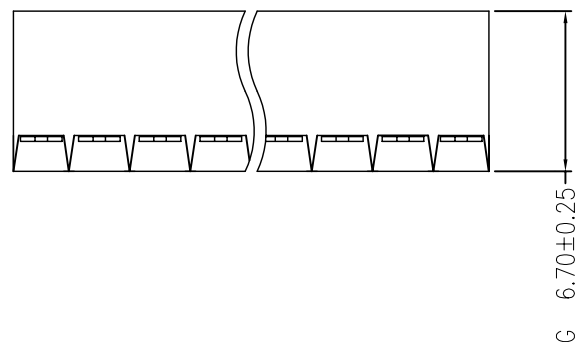
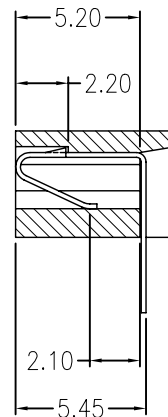
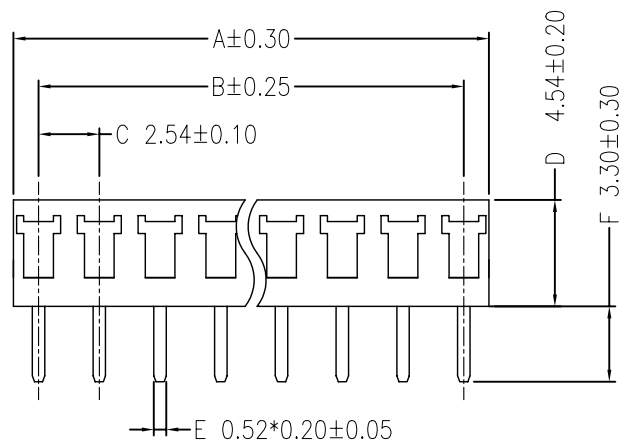


RECOMMENDED PCB LAYOUT

NOTE:

■ MATERIAL

HOUSING: PBT.

CONTACT: PHOSPHOR BRONZE.

PLATING: TIN

■ ELECTRICAL

CURRENT RATING: 1 AMP.

DIELECTRIC WITHSTANDING VOLTAGE: 800 VAC MIN.

INSULATION RESISTANCE: 1000 MEGOHMS MIN.

CONTACT RESISTANCE: 20 MILLIOHMS MAX.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO 85°C.

■ DIMENSIONAL INFORMATION

Circuits	Dimension	
	A	B
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86
11	27.94	25.40
12	30.48	27.94
13	33.02	30.48

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FFC-R-xx

DWG NO. FFC-R-xx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.3

.XX ± 0.2

.XXX ± 0.1

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司