


Features:

- 2 ~ 15 circuits available
- Material: PBT, UL 94V-0

Specification:

- Current rating: 1A AC, DC
- Voltage rating: 100V AC, DC
- Insulation resistance: 100M Ω Min.
- Withstand voltage: 250V AC/minute
- Temperature range: -40°C ~ 85°C

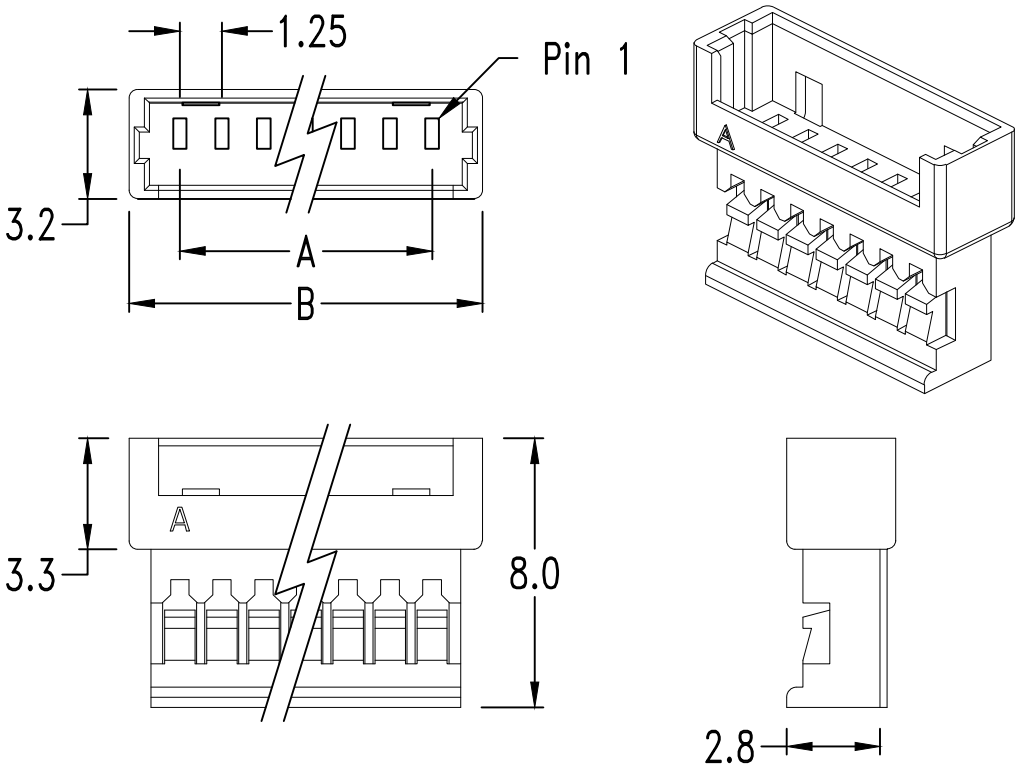

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	1.25	4.25	6	6.25	9.25	10	11.25	14.25	14	16.25	19.25
3	2.50	5.50	7	7.50	10.50	11	12.50	15.50	15	17.50	20.50
4	3.75	6.75	8	8.75	11.75	12	13.75	16.75			
5	5.00	8.00	9	10.00	13.00	13	15.00	18.00			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

FH-P-xx-LF
SERIES | T LEADFREE
02~15WAY
MALE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com