
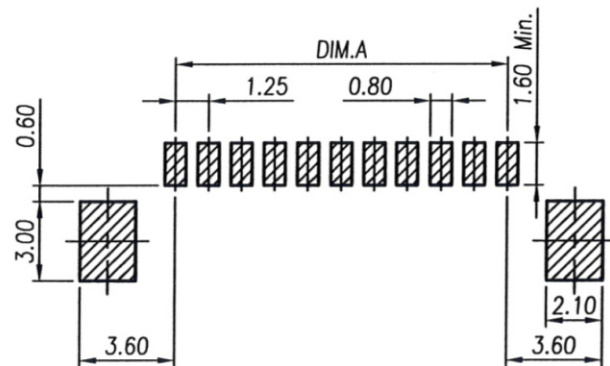

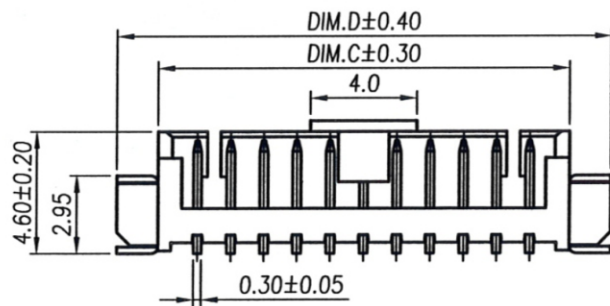


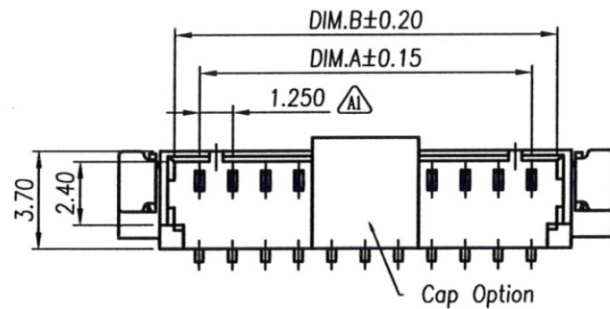

RECOMMENDED P.C.B LAYOUT

PIN	DIM.A	DIM.B	DIM.C	DIM.D
02	1.25	3.05	4.25	7.65
03	2.50	4.30	5.50	8.90
04	3.75	5.55	6.75	10.15
05	5.00	6.80	8.00	11.40
06	6.25	8.05	9.25	12.65
07	7.50	9.30	10.50	13.90
08	8.75	10.55	11.75	15.15
09	10.00	11.80	13.00	16.40
10	11.25	13.05	14.25	17.65
11	12.50	14.30	15.50	18.90
12	13.75	15.55	16.75	20.15
13	15.00	16.80	18.00	21.40
14	16.25	18.05	19.25	22.65
15	17.50	19.30	20.50	23.90

Specification


- 1.Current Rating:1A
- 2.Voltage Rating:125V AC
- 3.Contact Resistance:20mΩ Max.(Initial) 40mΩ Max.(Final)
- 4.Insulation Resistance:100MΩ Min. At 500V
- 5.Dielectric Withstanding Voltage:AC250V/Minute
- 6.Operating Temperature:-40°C~+85°C

Material:

- 1.Housing:High Temperature Thermoplastic UL94V-0
- 2.Tab:Copper Alloy T=0.25mm
- 3.Contact Pin:Copper Alloy T=0.30mm
- 4.Cap:High Temperature Thermoplastic UL94V-0(None-HF)

Finish:

- 1.Housing:Nature
- 2.Tab:Matte Tin Plated Over Nickel
- 3.Contact Pin:Matte Tin Plated Over Nickel
- 4.Cap:Nature

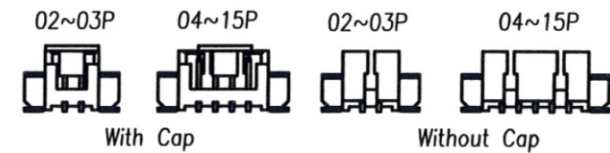

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION






X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION


FH-VCR-xx-LF
SERIES T LEADFREE
02~15WAY
REEL
CAP
180°SMT

DESCRIPTION:

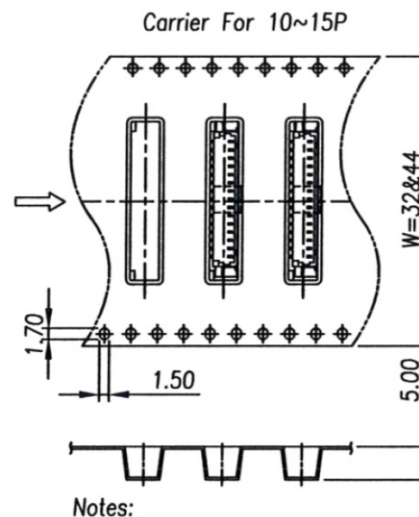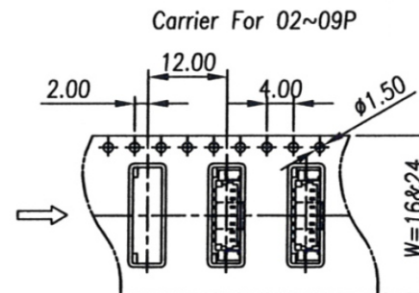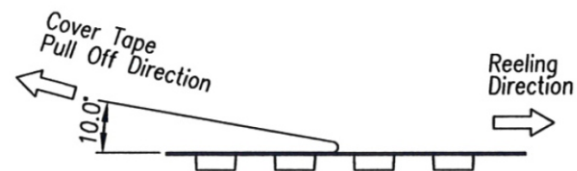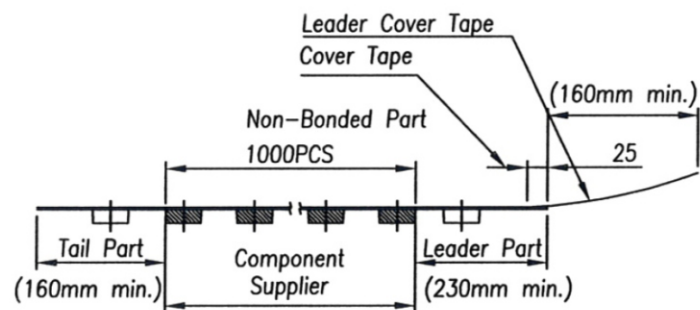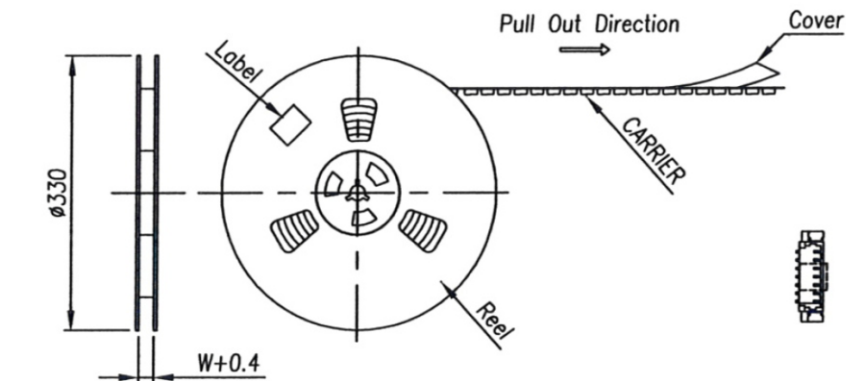

Notes:
1. Material : PS

PIN NO.	W ±0.30	PCS / REEL
02 ~ 03	16	1000
04 ~ 09	24	
10 ~ 13	32	
14 ~ 15	44	

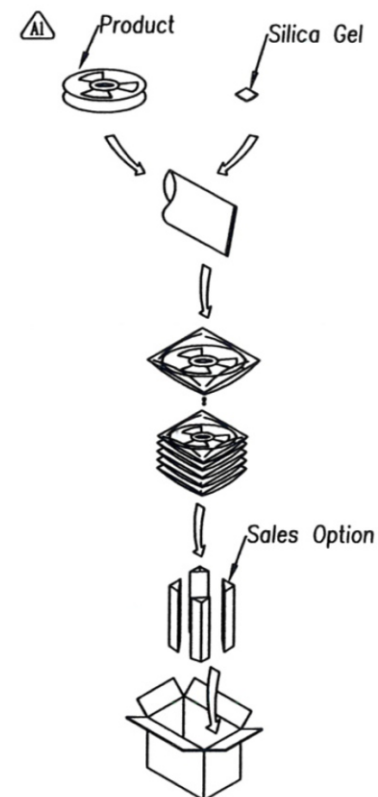

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FH-VCR-xx-LF
SERIES T LEADFREE
02~15WAY
REEL
CAP
180°SMT

DESCRIPTION: