

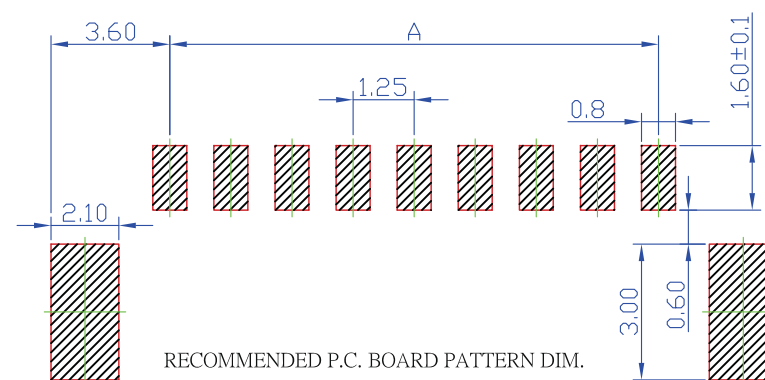
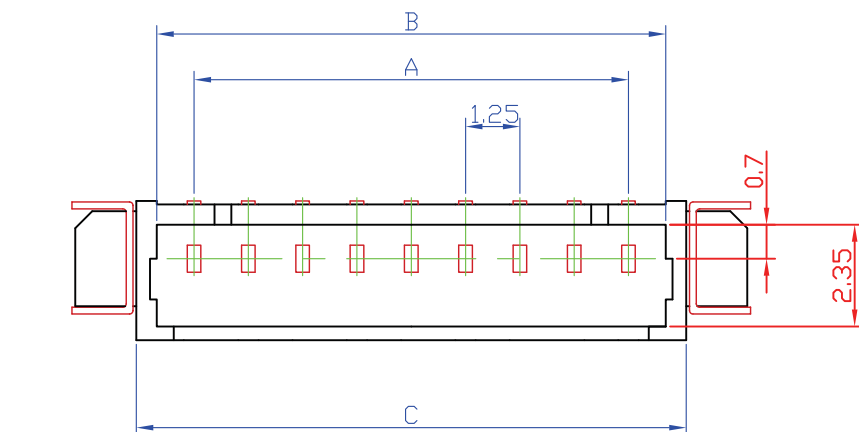




CKT.	A	B	C	D
2	1.25	3.05	4.25	7.65
3	2.50	4.30	5.50	8.90
4	3.75	5.55	6.75	10.15
5	5.00	6.80	8.00	11.40
6	6.25	8.05	9.25	12.65
7	7.50	9.30	10.50	13.90
8	8.75	10.56	11.75	15.15
9	10.00	11.80	13.00	16.40
10	11.25	13.05	14.25	17.65
11	12.50	14.30	15.50	18.90
12	13.75	15.55	16.75	20.15
13	15.00	16.80	18.00	21.40
14	16.25	18.05	19.25	22.65
15	17.50	19.30	20.50	23.90

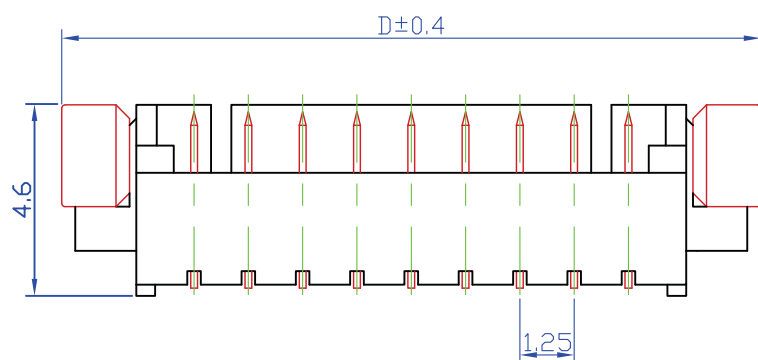


MATERIAL:

WAFER:HIGH TEMPERA TURE PLASTIC
HTN6T UL94V-0 Natural H/F
Contact Pin:Phosphor Bronze,Tin Plated Over Nickel
Tab:Brass,Tin Plated Over Nickel

SPECIFICATION:

Current Rating: 1A AC, DC
Voltage Rating: 125V AC,DC
Operating Temp.: -40°C ~ +85°C
Insulation Resistance: 100M Ω / min.
Dielectric Withstanding Voltage: 250V AC/ minute
Contact Resistance: 20m Ω / max.

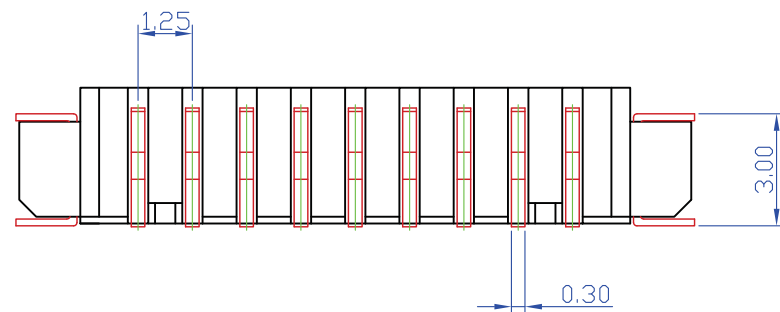

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION




X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$



ORDER INFORMATION

FH-WR-xx-LF
SERIES REEL LEADFREE
02~15 WAY
90°SMT

DESCRIPTION: WIRE TO BOARD 1.25mm WAFER SMT R/A

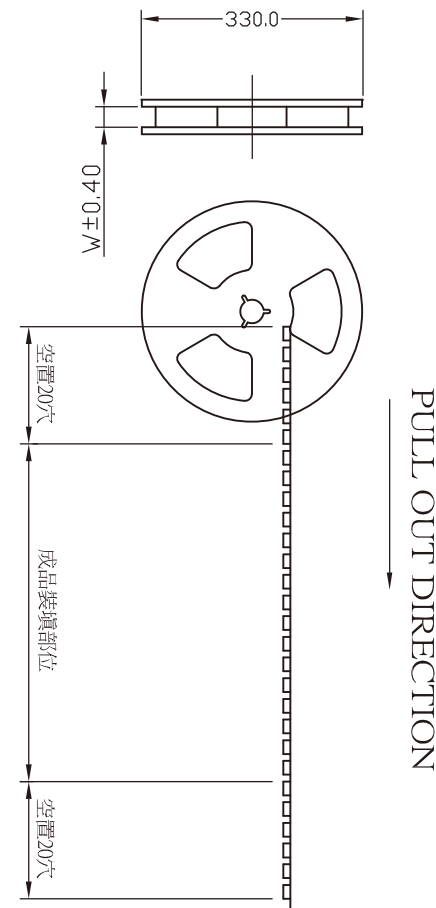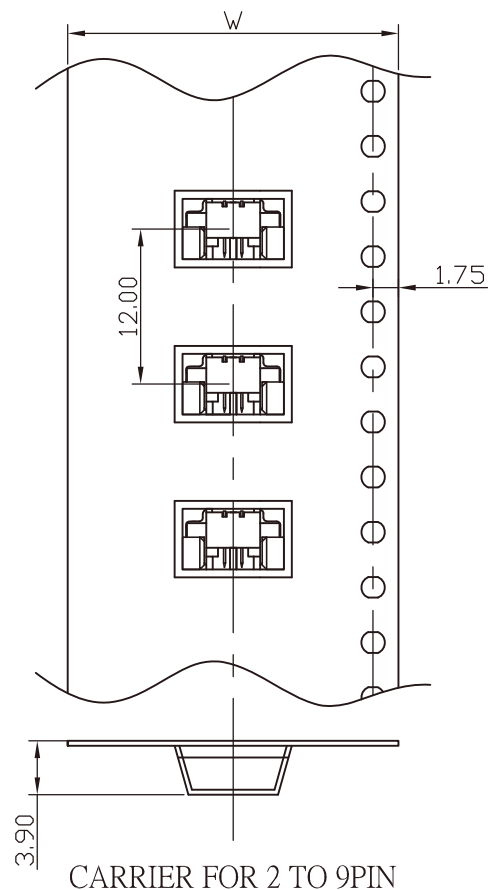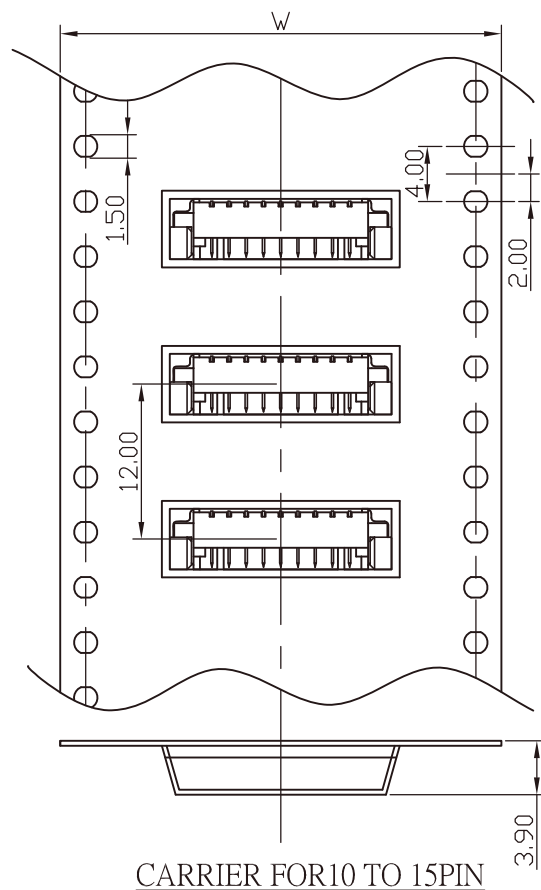

CKT.OF	2	3	4	5	6	7	8	9	10	11	12	13	14	15
DIM.W	16.0 (0.630)				24.0 (0.944)					32.0 (1.260)			44.0 (1.730)	
AMOUNT	1000 PCS													

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION



ORDER INFORMATION

FH-WR-xx-LF
SERIES REEL
LEADFREE
02~15 WAY
90°SMT

DESCRIPTION: WIRE TO BOARD 1.25mm WAFER SMT R/A