


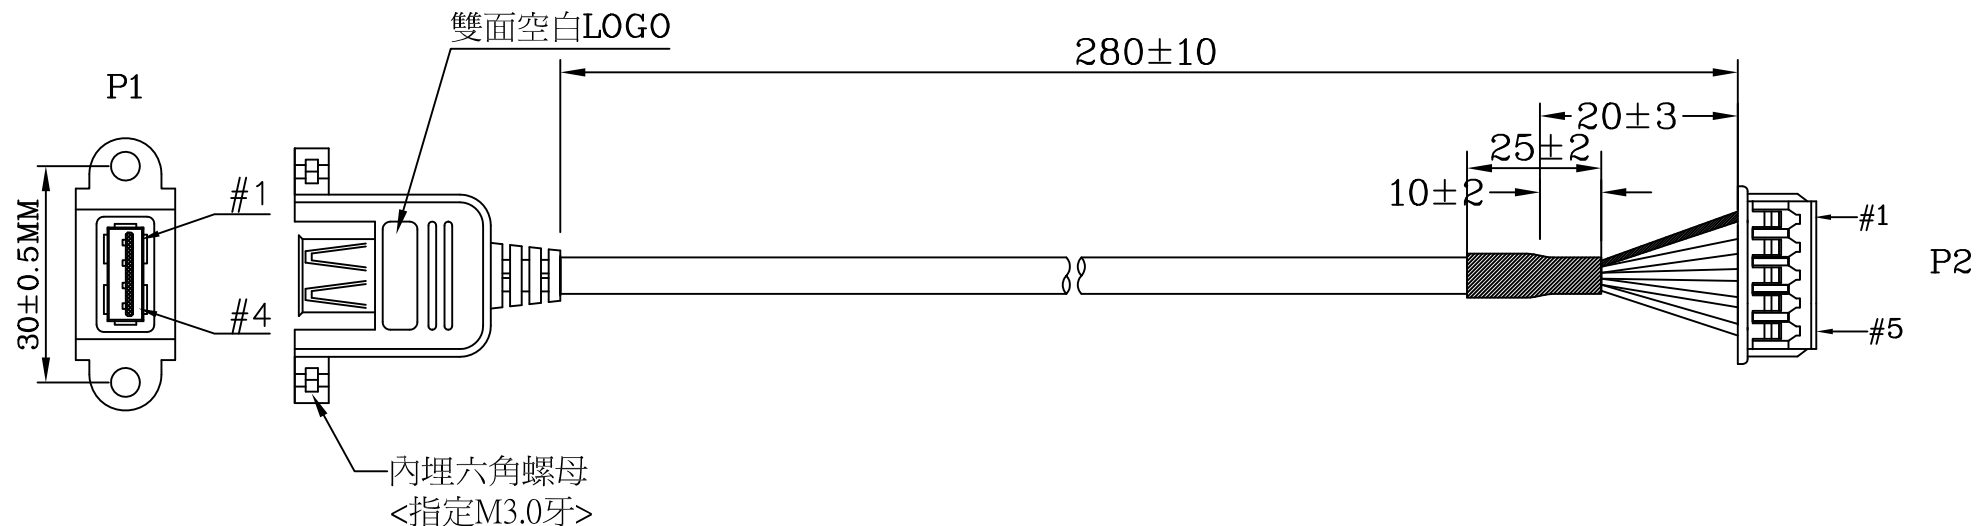

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
S	BRAID	5

7		NUTS:4.75*2.0MM <指定M3.0>	2	PCS
6	TUBE	HT-TUBE-OD:1.0MM	20*1	MM
5	TUBE	HT-TUBE-OD:4.0MM	25*1	MM
4	TERMINAL	TERMINAL:A1250-T<TIN>	5	PCS
3	HOUSING	HOUSING:A1250-H-5P(WHITE)<PH:1.25MM>	1	PCS
2	CONNECTOR	USB-A-S<WH>	1	PCS
1	CABLE	UL2725 (1P+2C)+ADB,GRAY22,OD:3.8MM (28/28)<REV:2.0>	280	mm
NO	PART NO.	DESCRIPTION	QTY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG ±



ORDER INFORMATION

FHUB-054A28PE-F28C-LF

SERIES

5 PIN TO 4 PIN A TYPE

LEADFREE
280mm
FEMALE TO FEMALE
EAR
PANEL
28 AWG

DESCRIPTION: USB A F/1.25 FH 5P L:280mm BLACK