




| PIN ASSIGNMENT |       |  |    |  |
|----------------|-------|--|----|--|
| P1             |       |  | P2 |  |
| 1              | RED   |  | 1  |  |
| 2              | WHITE |  | 2  |  |
| 3              | GREEN |  | 3  |  |
| 4              | BLACK |  | 4  |  |
| S              | BRAID |  | 5  |  |

RoHS Compliant

| NO | PART NO.  | DESCRIPTION                                         | QTY  | UNIT |
|----|-----------|-----------------------------------------------------|------|------|
| 7  |           | NUTS:4.75*2.0MM <指定M3.0>                            | 2    | PCS  |
| 6  | TUBE      | HT-TUBE-OD:1.0MM                                    | 20*1 | MM   |
| 5  | TUBE      | HT-TUBE-OD:4.0MM                                    | 25*1 | MM   |
| 4  | TERMINAL  | TERMINAL:A1250-T<TIN>                               | 5    | PCS  |
| 3  | HOUSING   | HOUSING:A1250-H-5P(WHITE)<PH:1.25MM>                | 1    | PCS  |
| 2  | CONNECTOR | USB-A-S<WH>                                         | 1    | PCS  |
| 1  | CABLE     | UL2725 (1P+2C)+ADB,GRAY22,OD:3.8MM (28/28)<REV:2.0> | 280  | mm   |

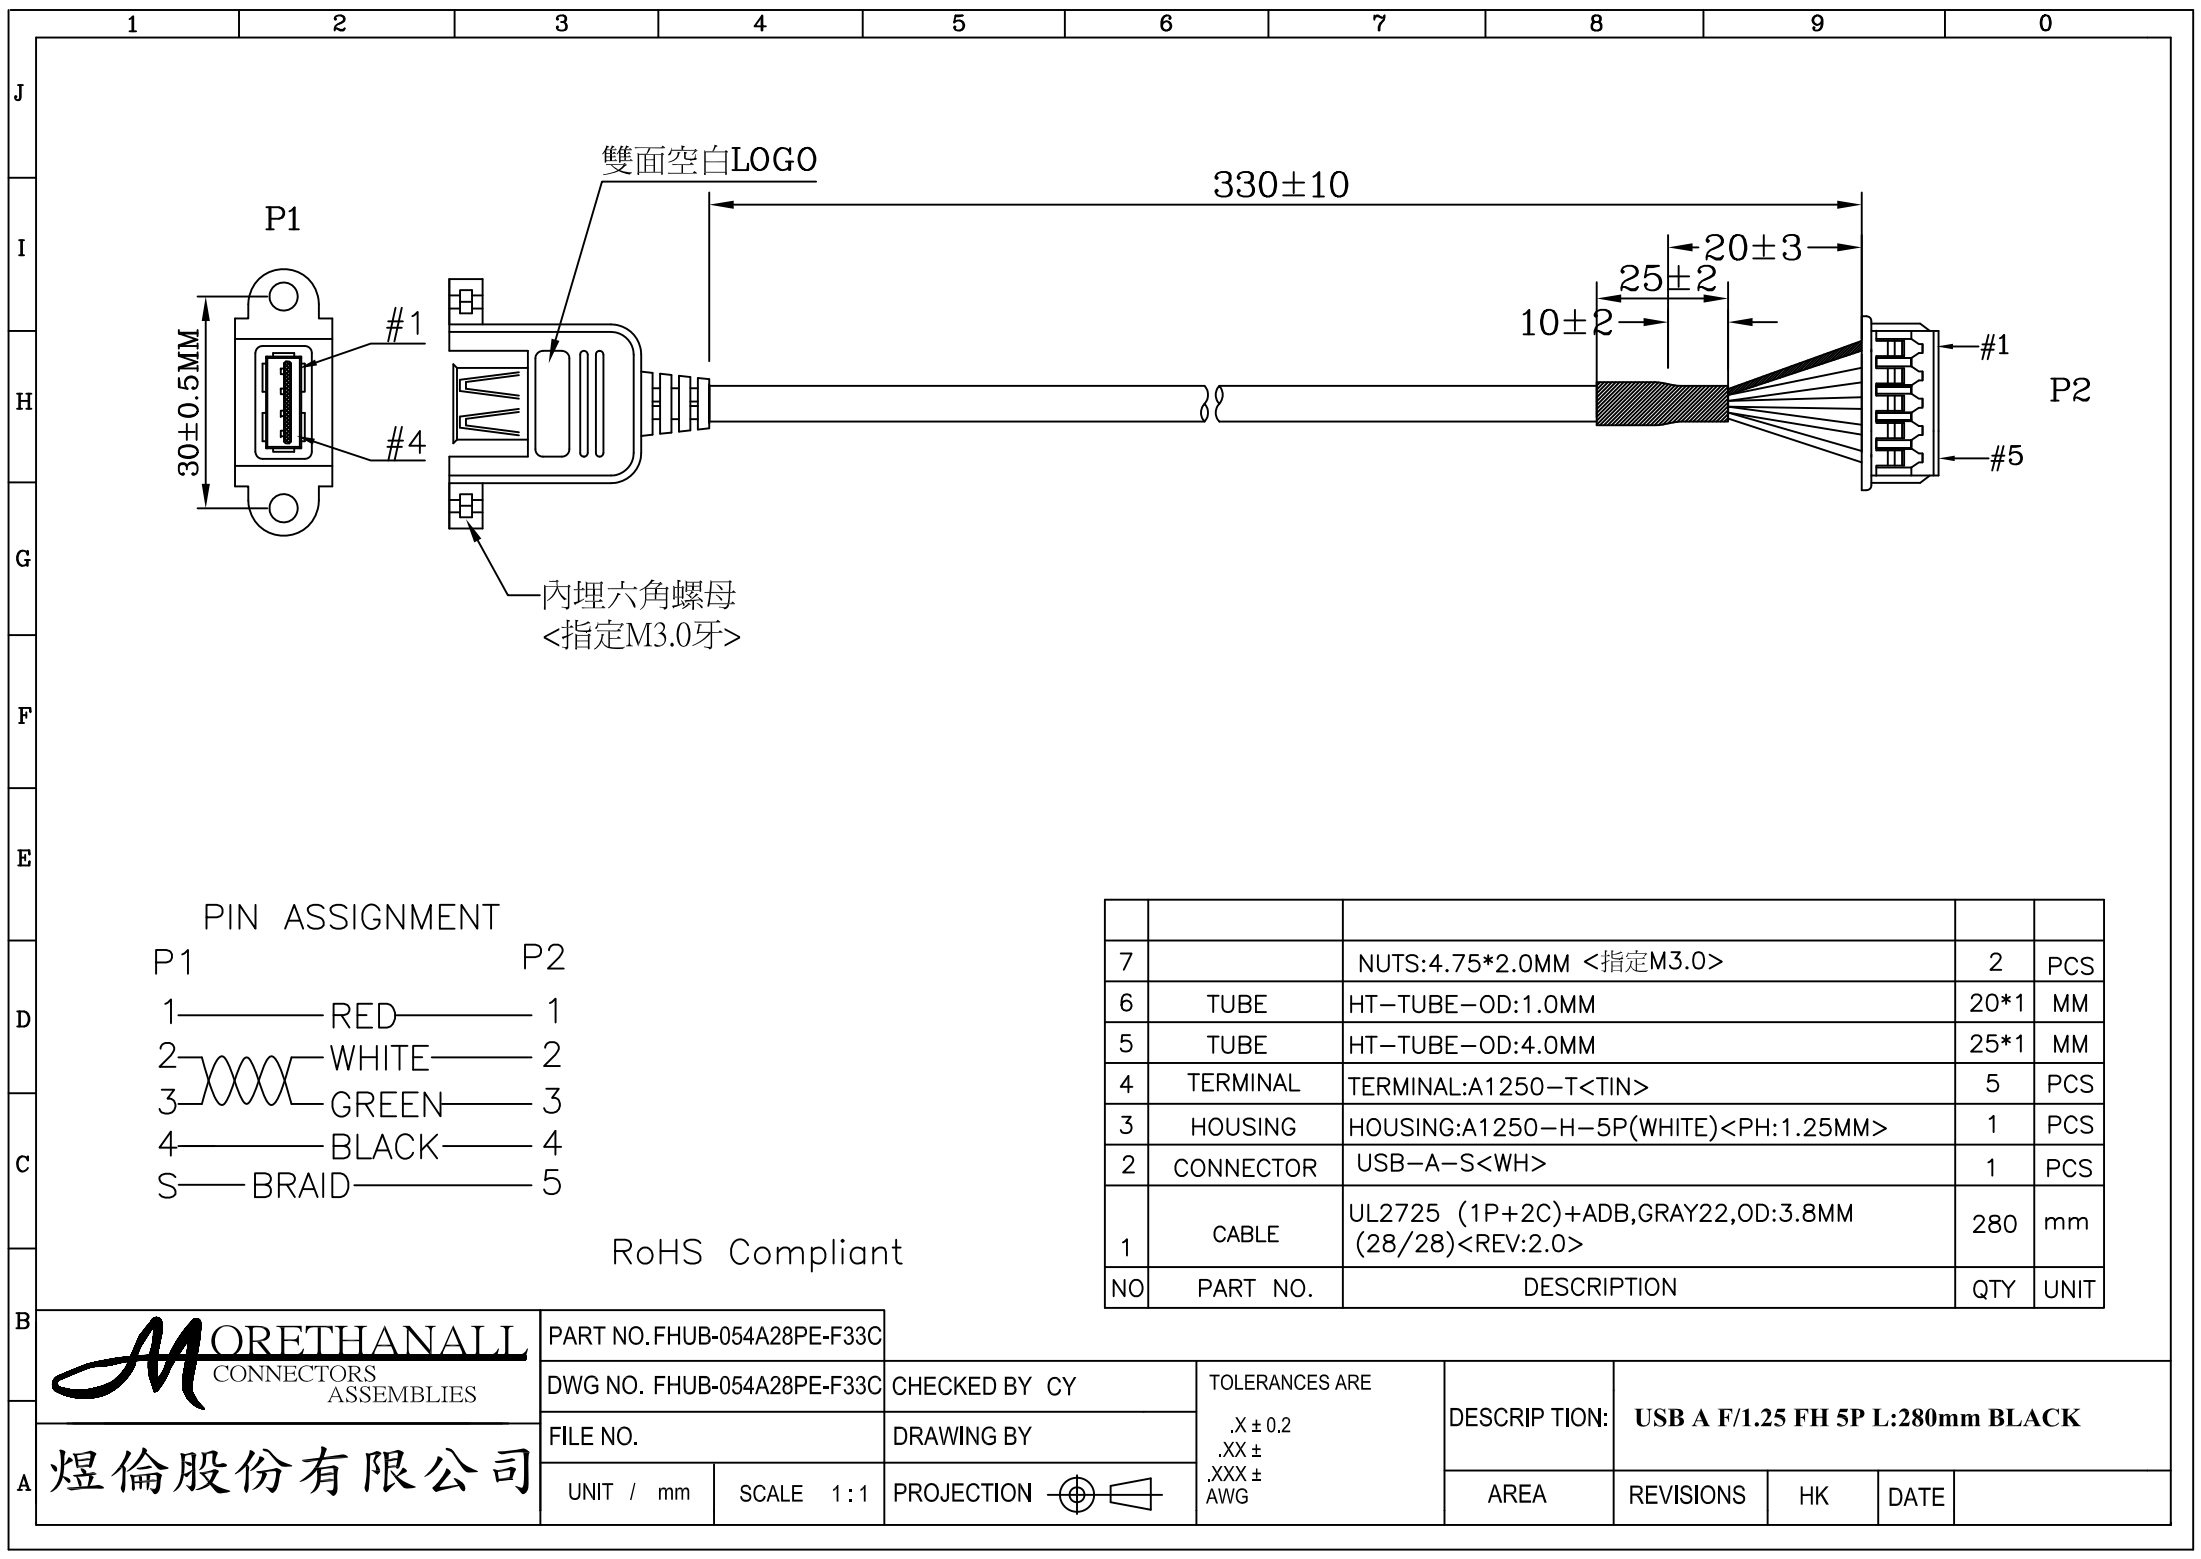

CONNECTORS  
ASSEMBLIES

煜倫股份有限公司

PART NO. FHUB-054A28PE-F33C

DWG NO. FHUB-054A28PE-F33C


FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION 

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIP TION: USB A F/1.25 FH 5P L:280mm BLACK

AREA

REVISIONS

HK

DATE