


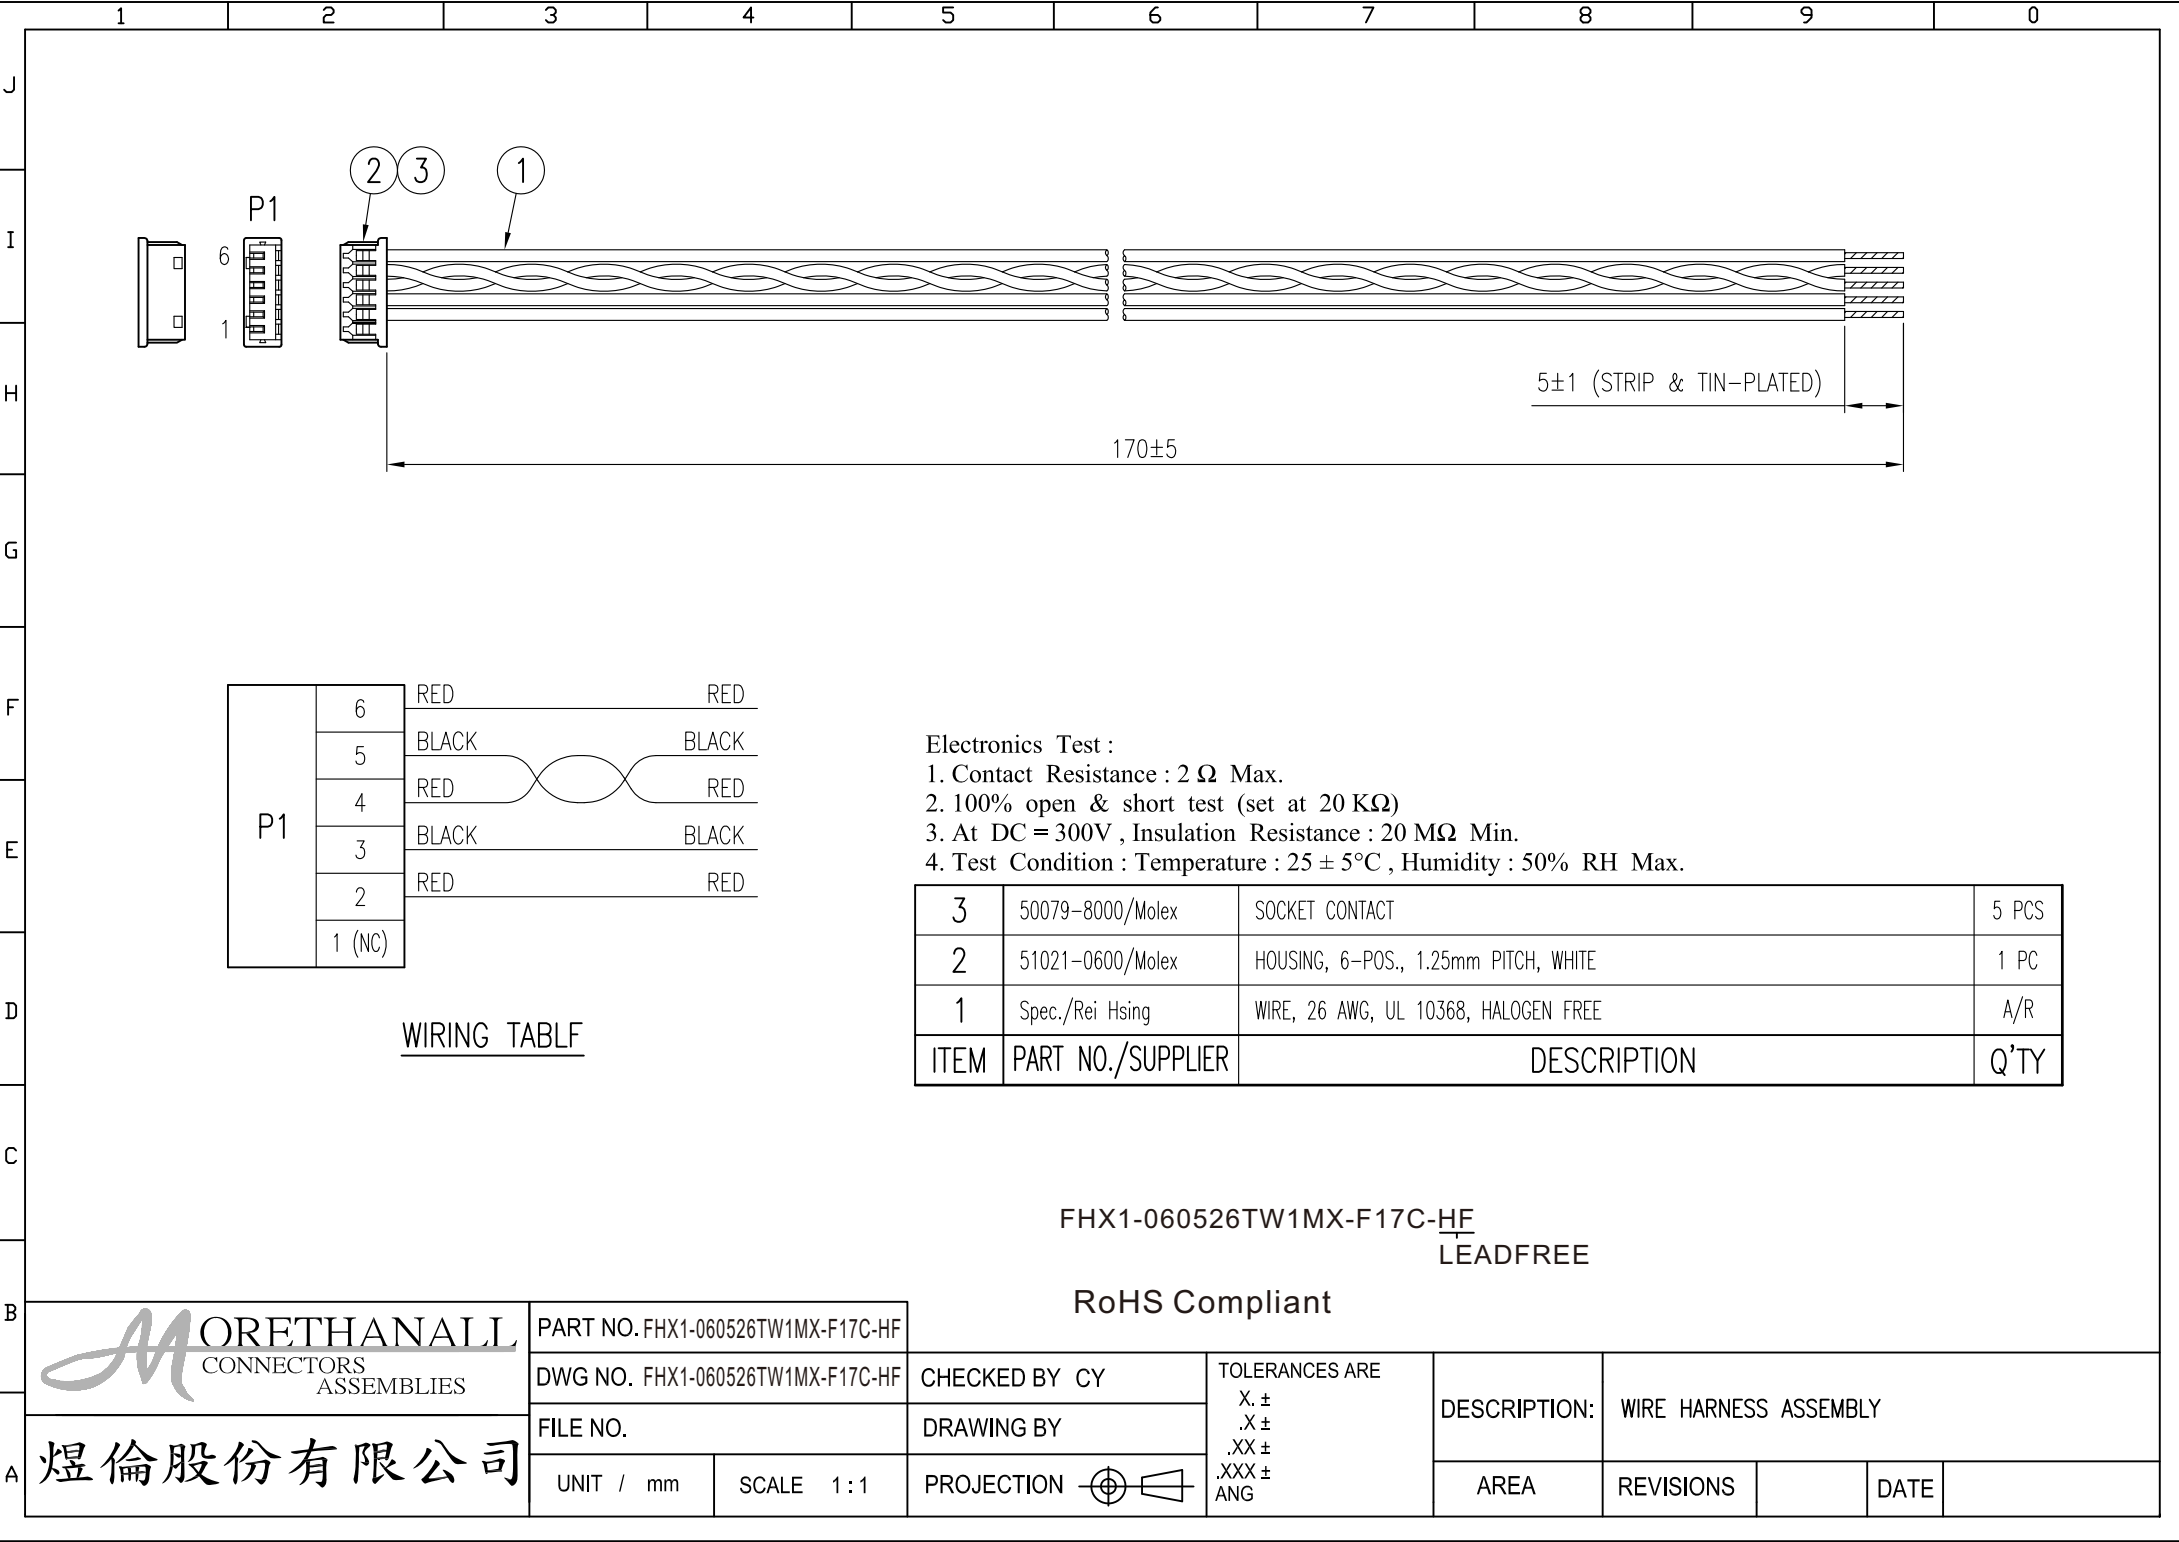

P1	6	RED	RED
	5	BLACK	BLACK
	4	RED	RED
	3	BLACK	BLACK
	2	RED	RED
	1 (NC)		

WIRING TABLF

Electronics Test :
1. Contact Resistance : 2 Ω Max.
2. 100% open & short test (set at 20 KΩ)
3. At DC = 300V , Insulation Resistance : 20 MΩ Min.
4. Test Condition : Temperature : 25 ± 5°C , Humidity : 50% RH Max.

3	50079-8000/Molex	SOCKET CONTACT	5 PCS
2	51021-0600/Molex	HOUSING, 6-POS., 1.25mm PITCH, WHITE	1 PC
1	Spec./Rei Hsing	WIRE, 26 AWG, UL 10368, HALOGEN FREE	A/R
ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY

FHX1-060526TW1MX-F17C-HF
LEADFREE

RoHS Compliant

B		ROHS Compliant											
		PART NO. FHX1-060526TW1MX-F17C-HF		DWG NO. FHX1-060526TW1MX-F17C-HF		CHECKED BY	CY	TOLERANCES ARE X. ± .X ± .XX ± .XXX ± ANG	DESCRIPTION:	WIRE HARNESS ASSEMBLY			
A	煜倫股份有限公司	FILE NO.		DRAWING BY									
		UNIT / mm	SCALE 1:1	PROJECTION 				AREA	REVISIONS		DATE		