


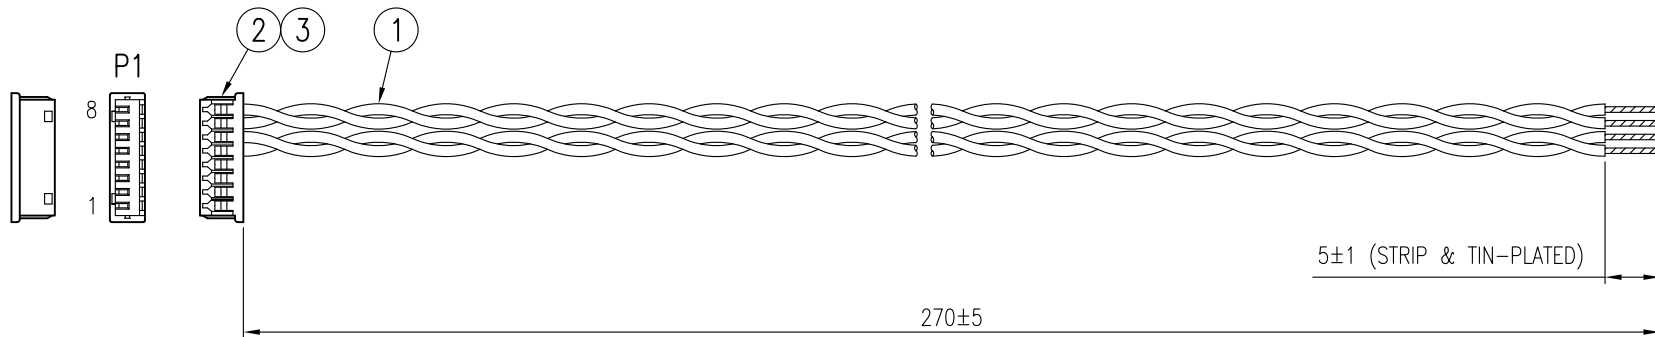

P1	8	RED	RED
	7	BLACK	BLACK
	6	RED	RED
	5	BLACK	BLACK
	4 (NC)		
	3 (NC)		
	2 (NC)		
	1 (NC)		

WIRING TABLE

Electronics Test :

1. Contact Resistance : 2Ω Max.
2. 100% open & short test (set at $20 K\Omega$)
3. At DC = 300V , Insulation Resistance : $20 M\Omega$ Min.
4. Test Condition : Temperature : $25 \pm 5^\circ C$, Humidity : 50% RH Max.

3	50079-8000/Molex	SOCKET CONTACT	4 PCS
2	51021-0800/Molex	HOUSING, 8-POS., 1.25mm PITCH, WHITE	1 PC
1	Spec./Rei Hsing	WIRE, 26 AWG, UL 10368, HALOGEN FREE	A/R
ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY

FHX1-080426TW2MX-F27C-HF

HALOGEN FREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FHX1-080426TW2MX-F27C-HF

DWG NO. FHX1-080426TW2MX-F27C-HF

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG

DESCRIPTION: WIRE HARNESS ASSEMBLY

AREA

REVISIONS

DATE

煜倫股份有限公司