


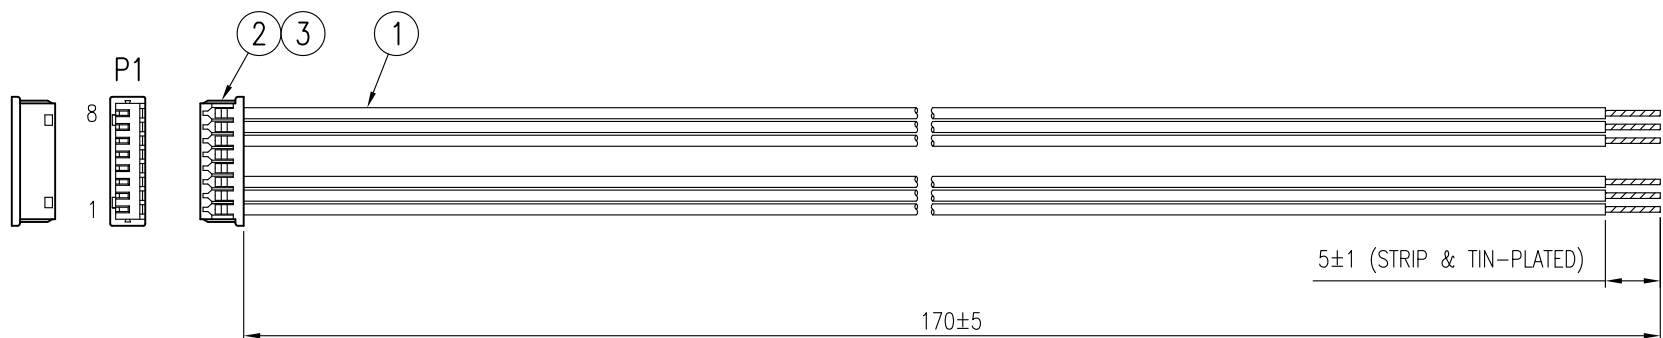

P1	8	GREEN
	7	BLACK
	6	YELLOW
	5 (NC)	---
	4 (NC)	---
	3	BLUE
	2	BLACK
	1	RED

WIRING TABLE

Electronics Test :

1. Contact Resistance : 2 Ω Max.
2. 100% open & short test (set at 20 K Ω)
3. At DC = 300V , Insulation Resistance : 20 M Ω Min.
4. Test Condition : Temperature : 25 $\pm$ 5°C , Humidity : 50% RH Max.

3	50079-8000/Molex	SOCKET CONTACT	6 PCS
2	51021-0800/Molex	HOUSING, 8-POS., 1.25mm PITCH, WHITE	1 PC
1	Spec./Rei Hsing	WIRE, 26 AWG, UL 10368, HALOGEN FREE	A/R
ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY

FHX1-080626MX-F17C-HF
HALOGEN FREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FHX1-080626MX-F17C-HF

DWG NO. FHX1-080626MX-F17C-HF

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG

DESCRIPTION: WIRE HARNESS ASSEMBLY

AREA

REVISIONS

DATE

煜倫股份有限公司