


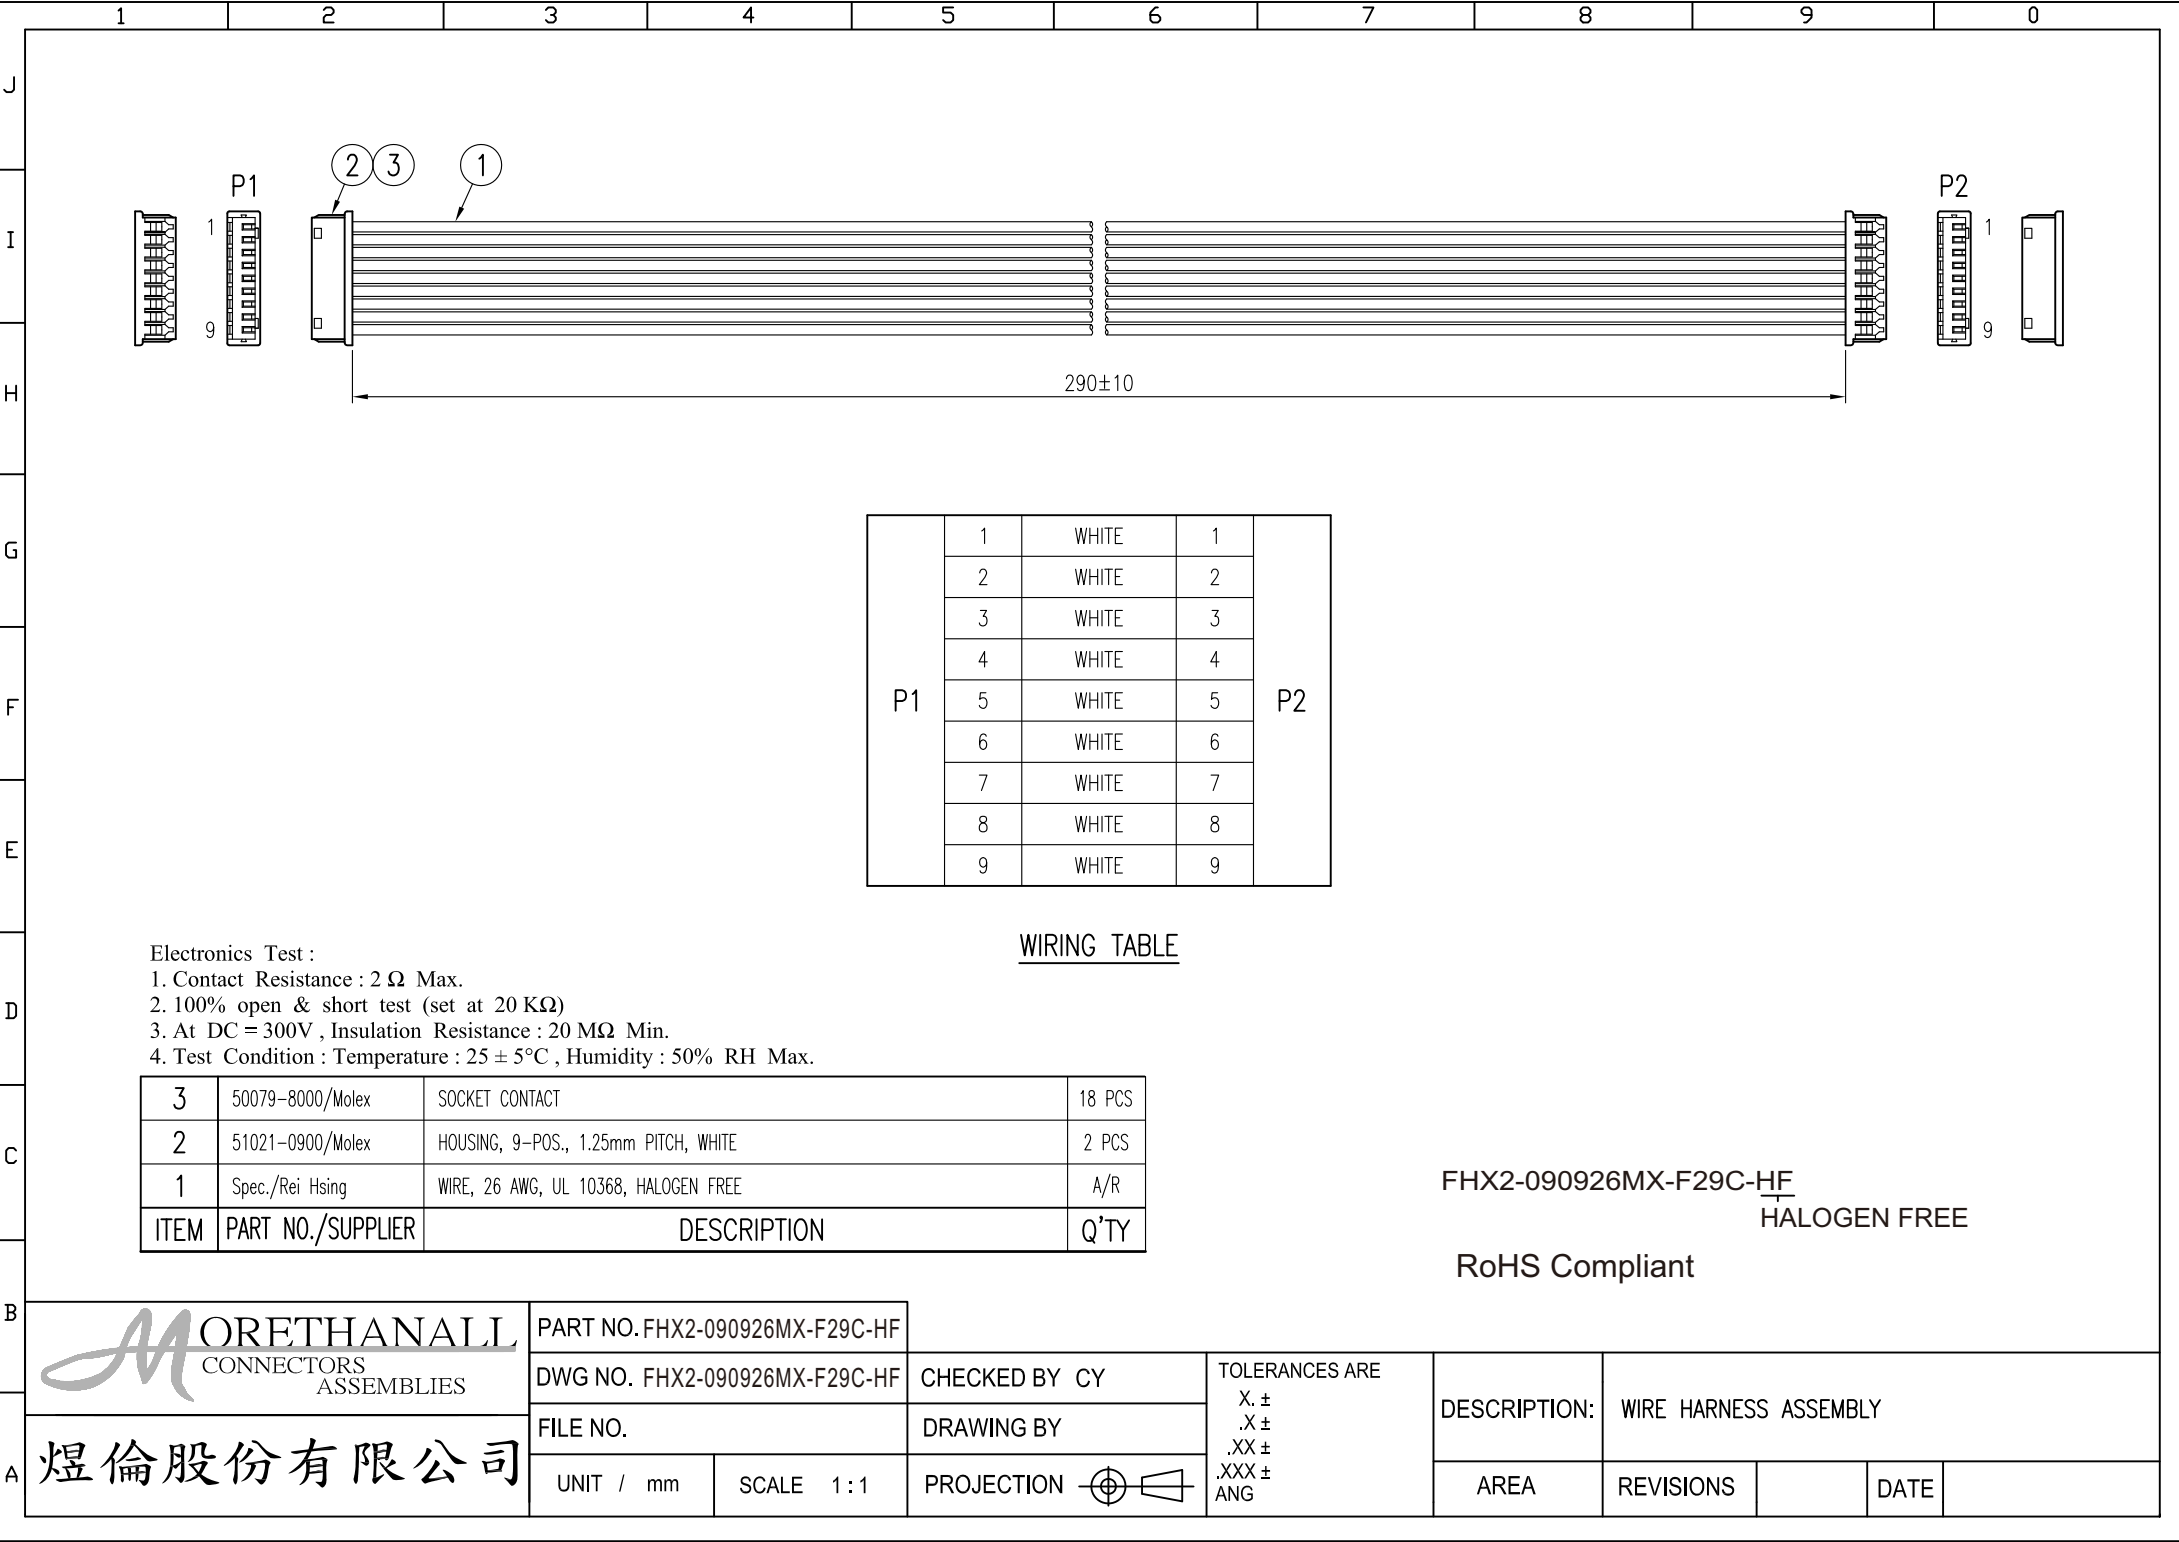


P1	1	WHITE	1	P2
	2	WHITE	2	
	3	WHITE	3	
	4	WHITE	4	
	5	WHITE	5	
	6	WHITE	6	
	7	WHITE	7	
	8	WHITE	8	
	9	WHITE	9	

WIRING TABLE

Electronics Test :
1. Contact Resistance : 2 Ω Max.
2. 100% open & short test (set at 20 KΩ)
3. At DC = 300V , Insulation Resistance : 20 MΩ Min.
4. Test Condition : Temperature : 25 ± 5°C , Humidity : 50% RH Max.

3	50079-8000/Molex	SOCKET CONTACT	18 PCS
2	51021-0900/Molex	HOUSING, 9-POS., 1.25mm PITCH, WHITE	2 PCS
1	Spec./Rei Hsing	WIRE, 26 AWG, UL 10368, HALOGEN FREE	A/R
ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY

FHX2-090926MX-F29C-HF
HALOGEN FREE
RoHS Compliant

A		PART NO. FHX2-090926MX-F29C-HF		TOLERANCES ARE X. ± .X ± .XX ± .XXX ± ANG	DESCRIPTION: WIRE HARNESS ASSEMBLY				
		DWG NO. FHX2-090926MX-F29C-HF		CHECKED BY CY					
		FILE NO.		DRAWING BY					
		UNIT / mm	SCALE 1 : 1	PROJECTION 	AREA	REVISIONS		DATE	