

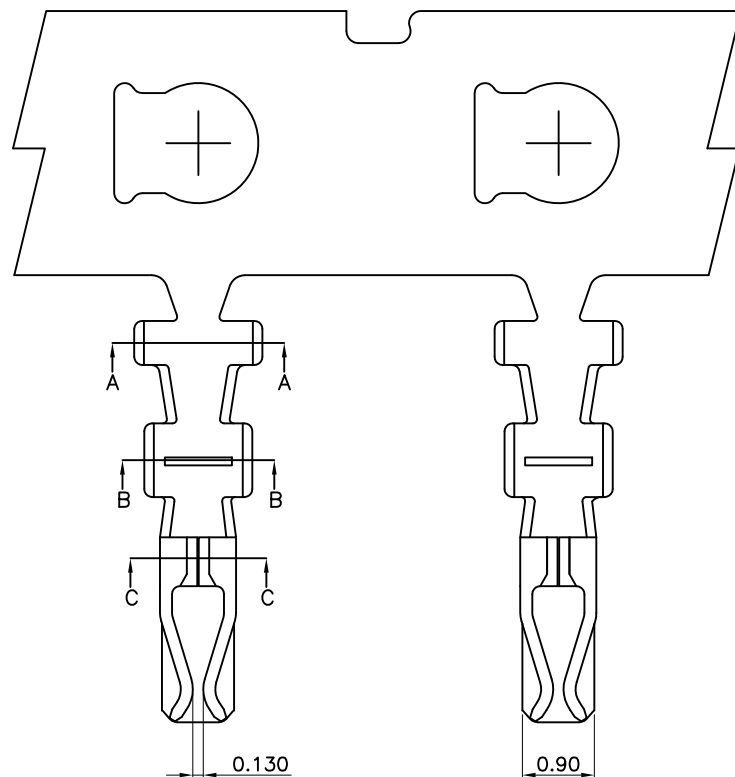


Section A-A



Section B-B



Section C-C

NOTES:

1. MATERIAL: PHOSPHOR BRONZE, $t=0.15\text{mm}$
2. FINISH: A TIN-PLATED OVER NICKEL.
AE PRESSING BEFORE 60u" TIN-PLATED OVER NICKEL.
GO GOLD FLASH OVER NICKEL.
G* GOLD *u" OVER NICKEL.
3. APPLICABLE WIRE RANGE: SEE CONTACT INFORMATION.
4. INSULATION O.D.: SEE CONTACT INFORMATION.
5. PACKING: 15K/REEL

Part No.	Wire Range	Insulation O.D.	DIM. (mm)			
			A	B	C	D
FI-T-28	AWG #28~#32	Ø0.50~0.90mm	1.60	1.40	1.35	1.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FI-T-28-LF
SERIES | T LEADFREE
28~32 AWG
TERMINAL

DESCRIPTION: