
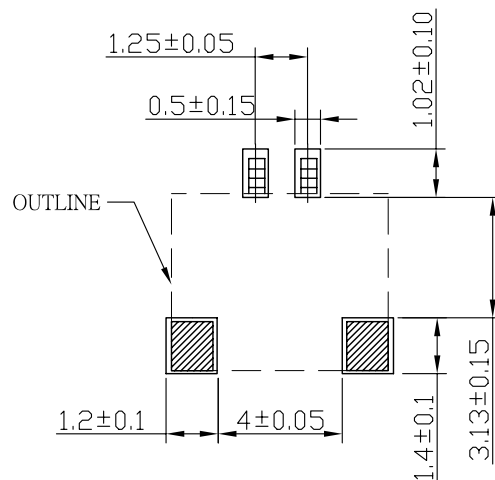

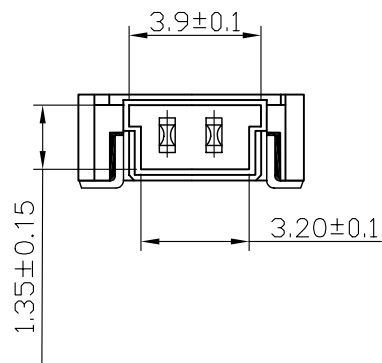
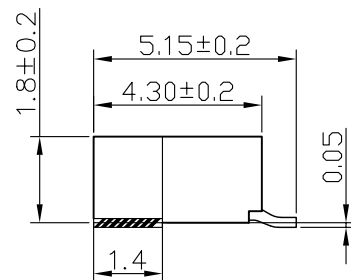


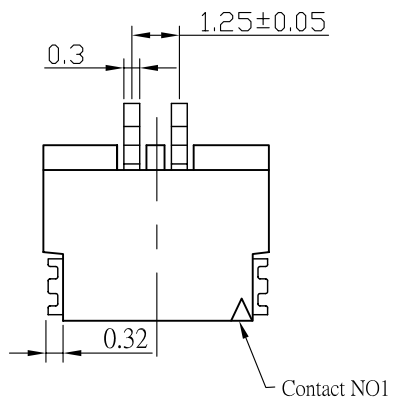

RECOMMENDED P.C. BOARD PATTERN DIM.

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC
 Voltage Rating: 100V AC, DC
 Operating Temp.: -25°C ~ +80°C
 Insulation Resistance: 100MΩ / min.
 Withstand Voltage: 500V AC / min.
 Contact Resistance: 40mΩ / max.

Material

Material: Nylon 6T, UL94V-0
 Contact: Copper Alloy
 Plating: Tin
 Shell: Copper Alloy / Tin Plating



煜倫有限公司

PART NO. FI-W-02

DWG NO. FI-W-02

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.25
 .XX ± 0.15
 .XXX ±
 AWG

DESCRIPTION:

WIRE TO BOARD FI 1.25mm 2 PIN WAFER SMT 90°

AREA

REVISIONS

HK

DATE