

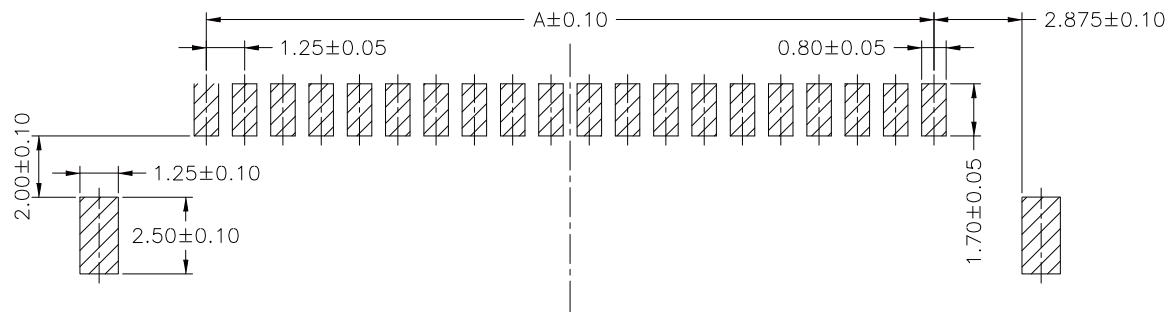
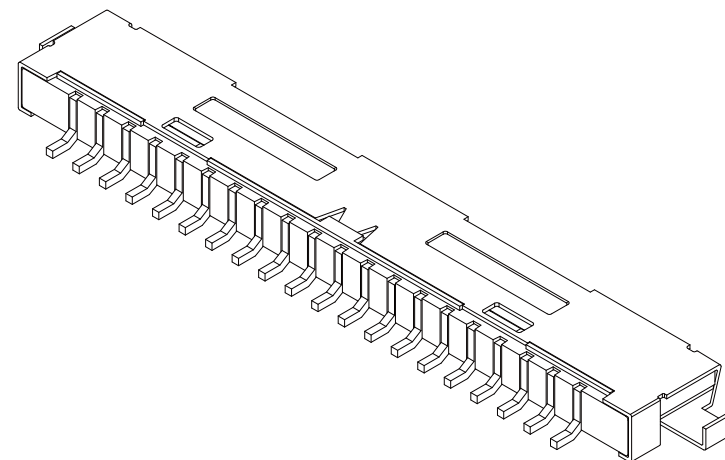


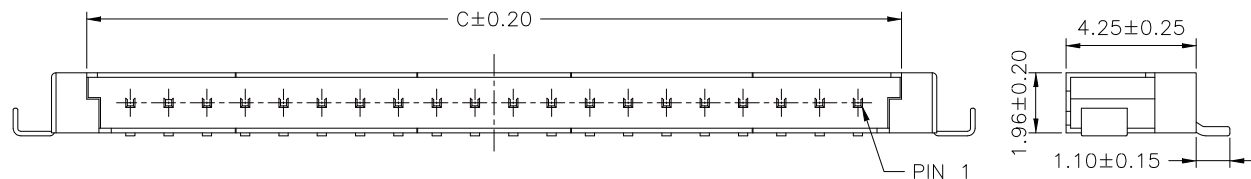

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

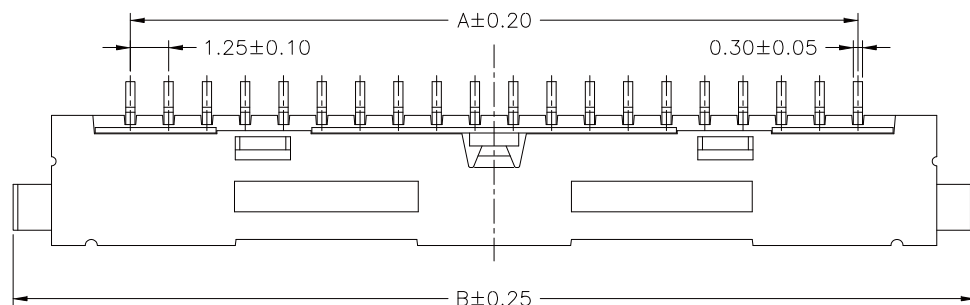

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Shell: Brass/Tin-plated
Material: LCP,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
FI-WM-20	23.75	31.40	26.60
FI-WM-30	36.25	43.90	39.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FI-WM-xx-LF
SERIES | LEADFREE
20,30 WAY
METAL
90°SMT

DESCRIPTION: 1.25mm PITCH 90° WAFER-SMT TYPE, SHIELDED, TOP MOUNTING