
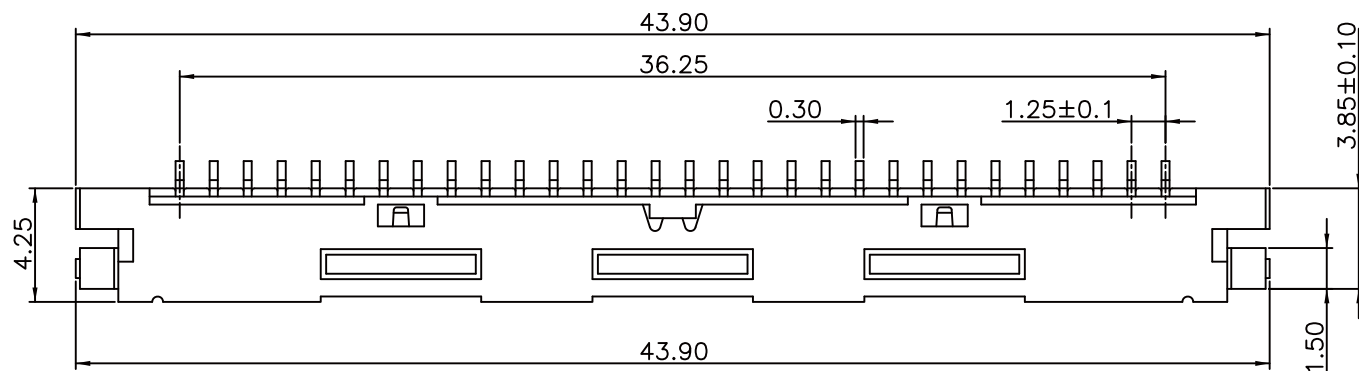


SOLDER AREA  0.10

NOTES:

1. INSULATOR: LCP , UL94V-0
2. CONTACT: COPPER ALLOY, 1: TIN PLATED OVER NICKEL(LEADFREE MATTE)
3. SHELL: NICKEL SILVER COPPER

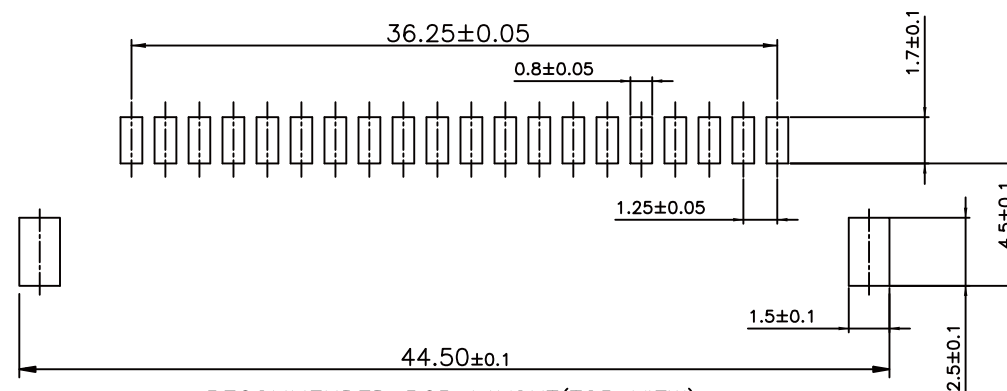

RECOMMENDED PCB LAYOUT(TOP VIEW)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±



PPOJECTION 

照片框

ORDER INFORMATION

FI-WMR-30-LF
SERIES REEL METAL 90°SMT
LEADFREE 30 WAY

DESCRIPTION:1.25mm PH BOARD TO WIRE FOR SHELL CONNECTEOR ON BOARD TYPE

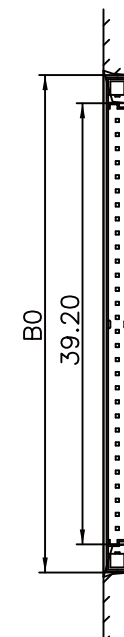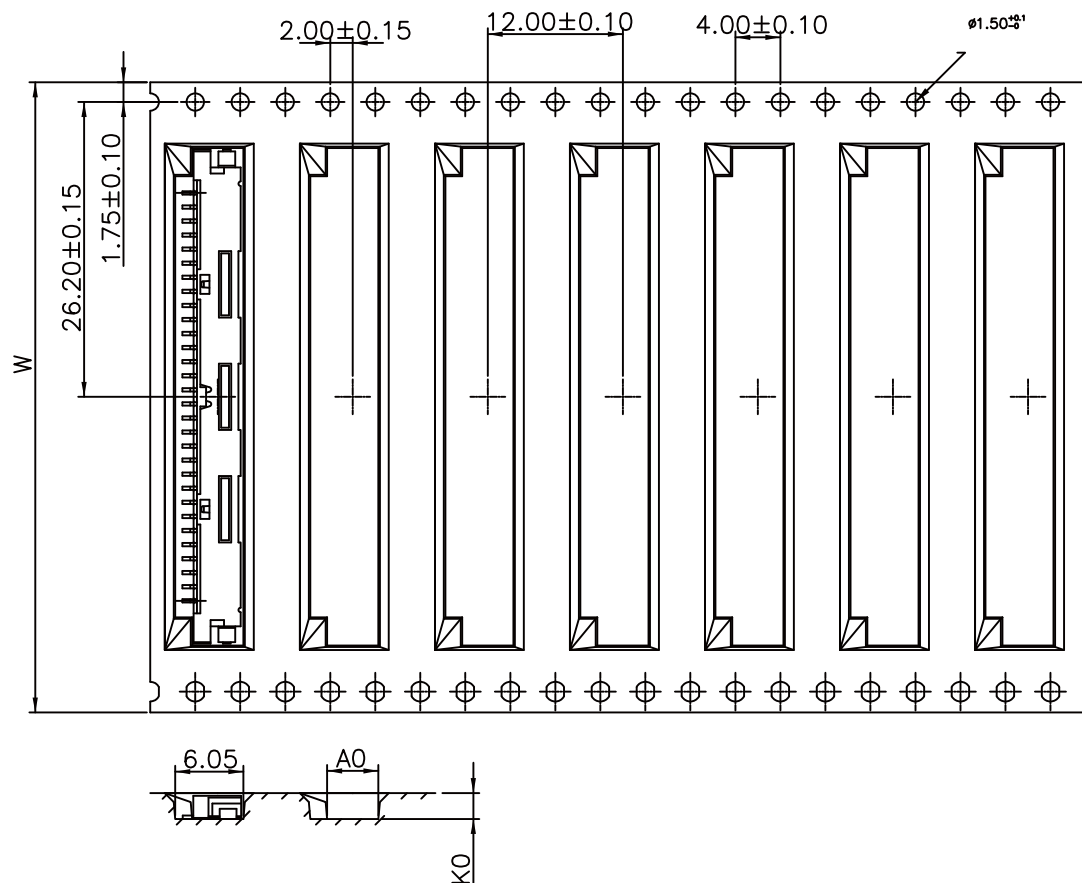

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy
4. All dimensions meet EIA-481-C requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Component load per 13" reel : 2000 pcs.

W	56.00 $\pm$ 0.30
A0	4.55 $\pm$ 0.10
B0	44.20 $\pm$ 0.10
K0	2.40 $\pm$ 0.10

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$


PPOJECTION

照片框

ORDER INFORMATION

FI-WMR-30-LF
SERIES REEL METAL 90°SMT
LEADFREE 30 WAY

DESCRIPTION: 1.25mm PH BOARD TO WIRE FOR SHELL CONNECTOR ON BOARD TYPE

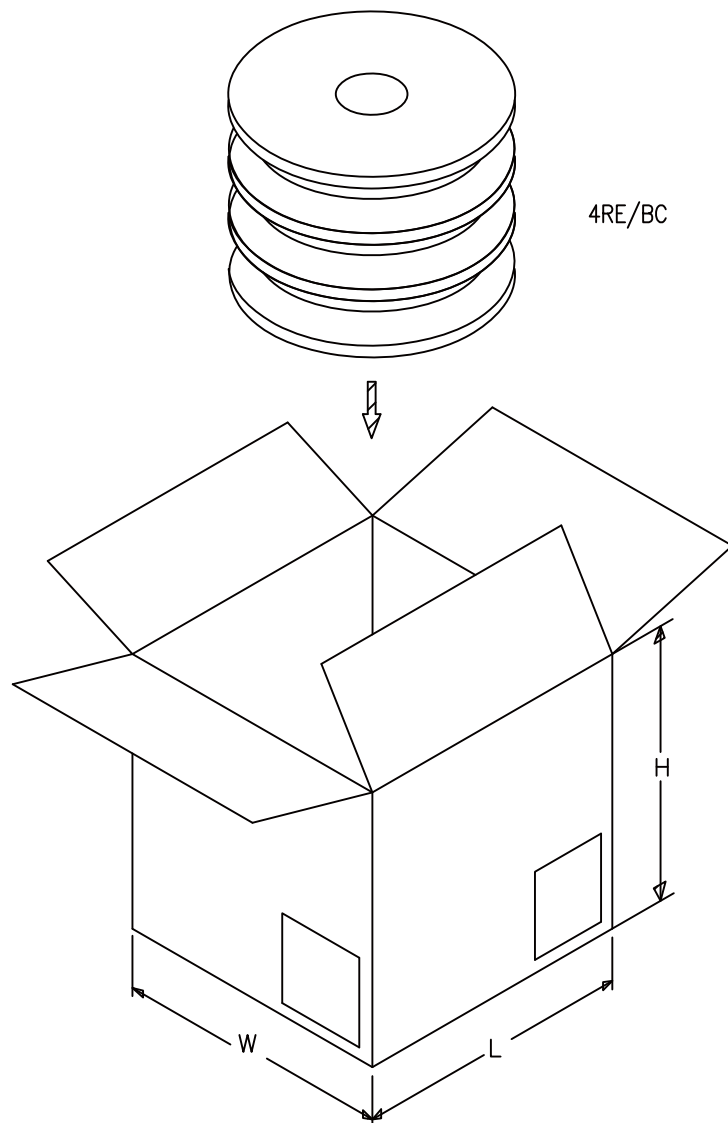

4RE/BC

PCAKING MATERIAL

PART NAME	DIM(mm)
REEL	330X56.5
BIG CARTON	350X350X340

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
FI-WMR-30	2000PCS/RE	4 RE/BC	8000 PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FI-WMR-30-LF
SERIES | | | LEADFREE
30 WAY
REEL
METAL
90°SMT

DESCRIPTION: 1.25mm PH BOARD TO WIRE FOR SHELL CONNECTOR ON BOARD TYPE